


Motor-Protective Circuit-Breakers **PKE**
Moeller® series



Product Range Catalog

Motor-Protective Circuit-Breakers PKE

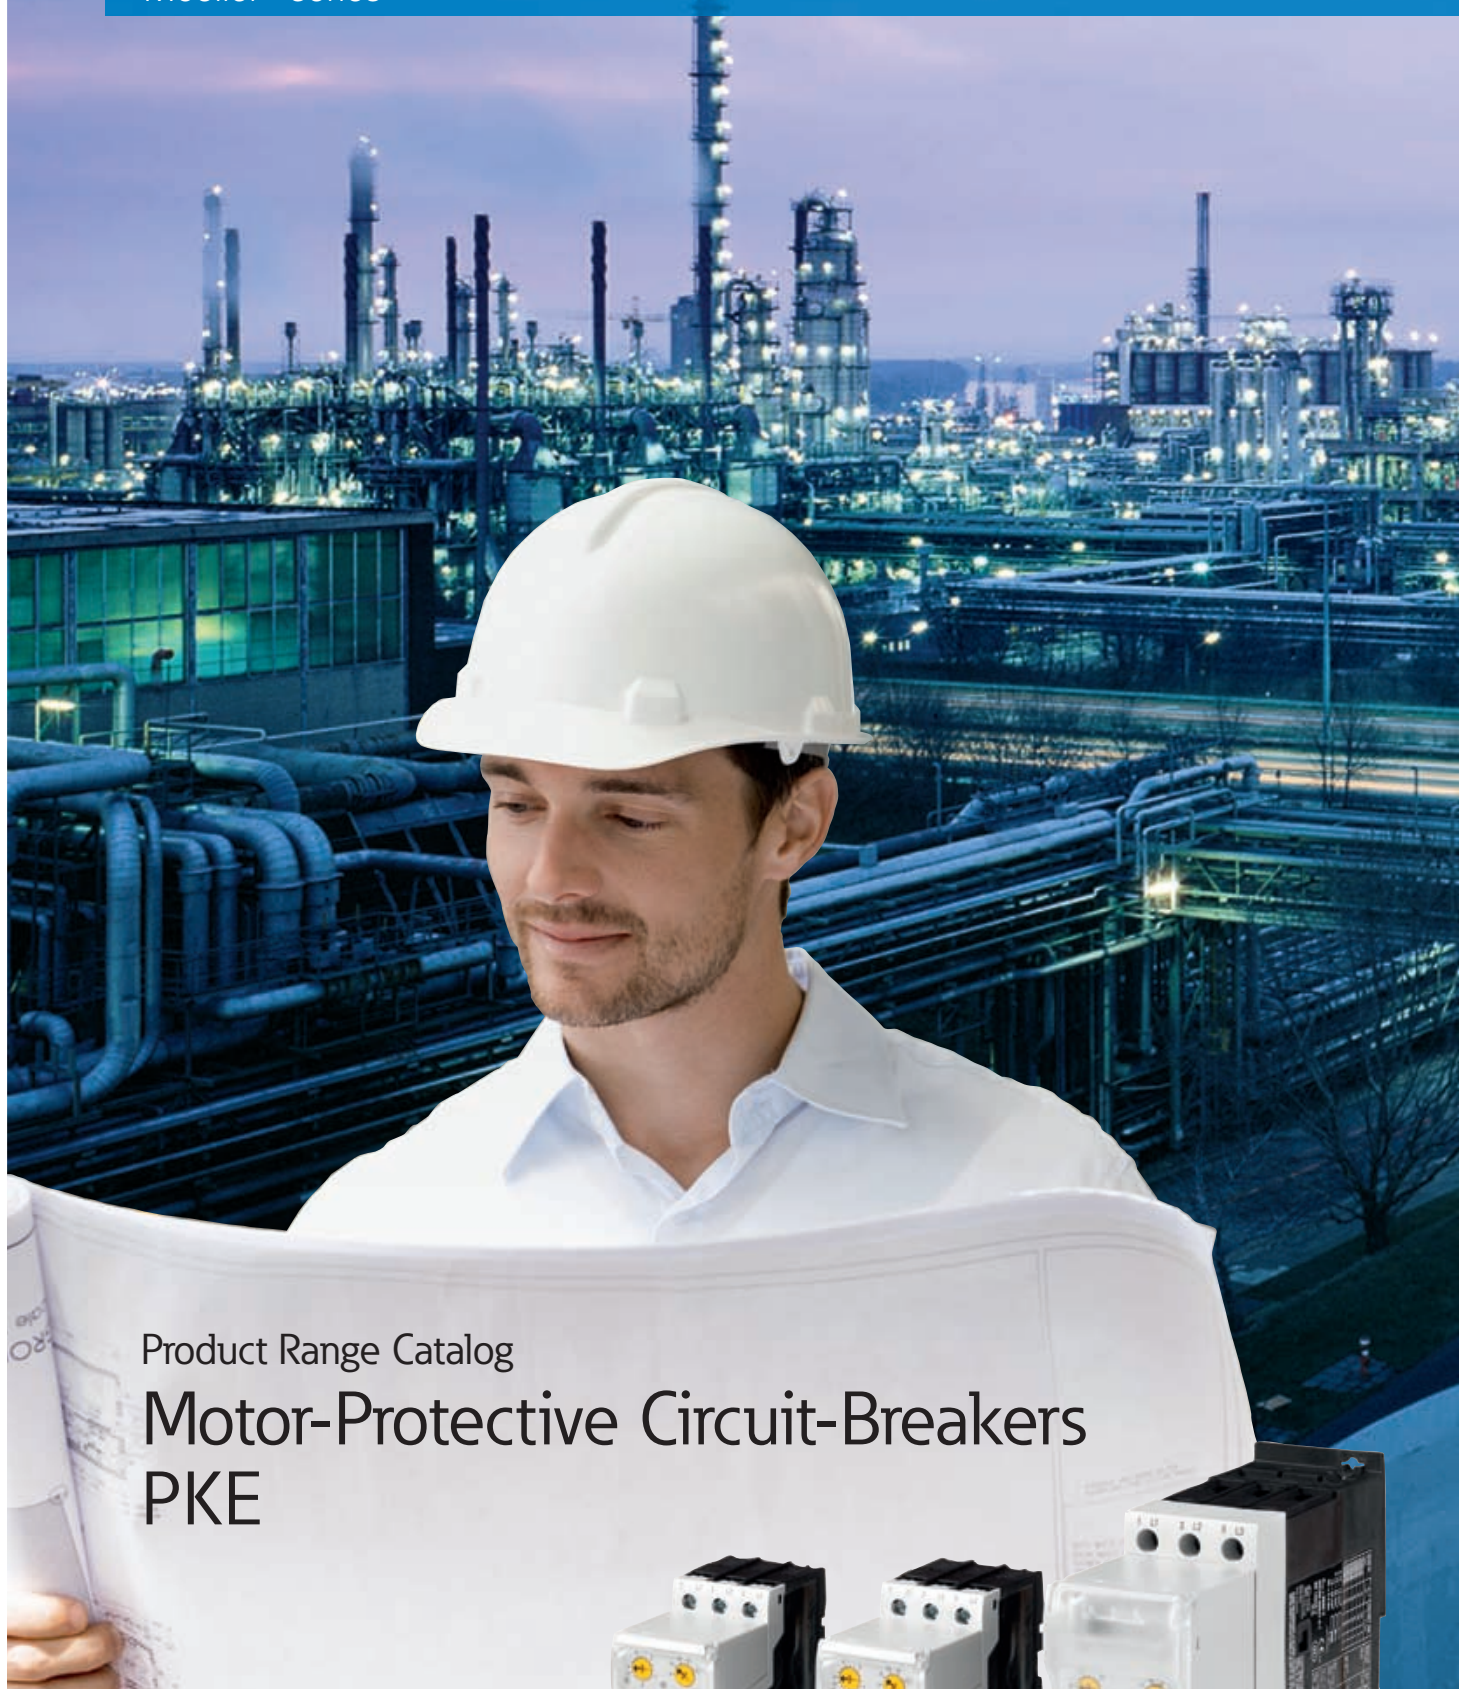


EATON

Powering Business Worldwide

EAT•N

The power of fusion.

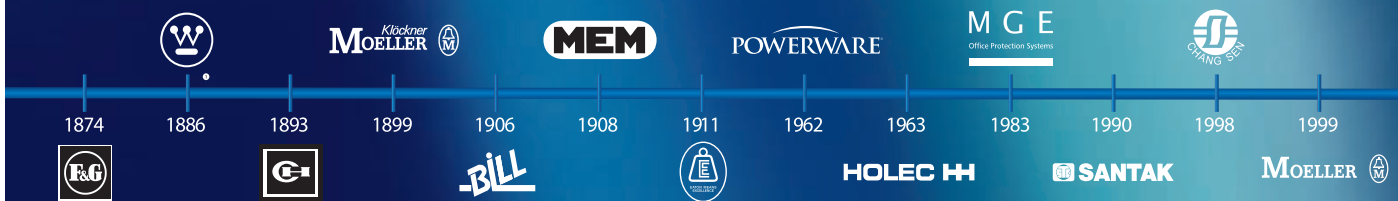


EAT•N

Powering Business Worldwide

There's a certain energy at Eaton. It's the power of uniting some of the world's most respected names to build a brand you can trust to meet every power management need. The energy created supports our commitment to powering business worldwide.

From generation and distribution to protection and control, Eaton allows you to proactively manage your complete power system by providing electrical solutions that make your applications safer, more reliable, and highly efficient. Visit www.eaton.com/electrical.

All of the above are trademarks of Eaton Corporation or its affiliates. ¹The Westinghouse brand name is used by temporary license in Asia Pacific. ©2010 Eaton Corporation.

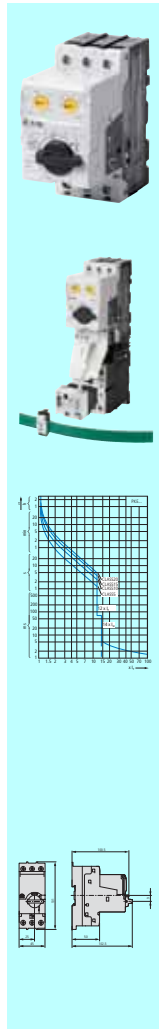

System overview

System overview	6
-----------------	---

Description

PKE motor-protective circuit-breaker	8
SmartWire-DT with PKE	10

Ordering

Motor-protective circuit-breaker	12
SmartWire-DT module	16
Accessories	17
Motor-starter combination	26

Engineering

Switching capacity	32
Characteristic curves	33
Switching of loads	34
Approvals	35

Technical data

Motor-protective circuit-breaker	36
SmartWire-DT module	37
Accessories	38

Dimensions

Motor-protective circuit-breaker	39
Accessories	40
Motor-starter combination	41



Aerospace



Truck



Electrical



Automotive



Hydraulics

Powering business worldwide

Eaton delivers the power inside hundreds of products that are answering the demands of today's fast changing world.

We help our customers worldwide manage the power they need for buildings, aircraft, trucks, cars, machinery and entire businesses. And we do it in a way that consumes fewer resources.

Next generation transportation

Eaton is driving the development of new technologies – from hybrid drivetrains and emission control systems to advanced engine components – that reduce fuel consumption and emissions in trucks and cars.

Higher expectations

We continue to expand our aerospace solutions and services to meet the needs of new aviation platforms, including the high-flying light jet and very light jet markets.

Building on our strengths

Our hydraulics business combines localised service and support with an innovative portfolio of fluid power solutions to answer the needs of global infrastructure projects, including locks, canals and dams.

Powering greener buildings and businesses

Eaton's Electrical Sector is a leading provider of power quality, distribution and control solutions that increase energy efficiency and improve power quality, safety and reliability. Our solutions offer a growing portfolio of "green" products and services, such as energy audits and real-time energy consumption monitoring. Eaton's Uninterruptible Power Supplies (UPS), variable-speed drives and lighting controls help conserve energy.



Powering Business Worldwide



Powering electrical systems worldwide

Eaton can help you manage your complete electrical power and control system, whether it is contained within a manufacturing facility, university campus, healthcare centre, data centre, geographically dispersed set of office buildings or retail stores, residential or any other entity where electricity must function reliably, efficiently and safely.

Buildings

- Residential
- Healthcare
- Education
- Commercial offices
- Retail
- Public sector
- Airports

Industrial & Machinery

- Manufacturing
- Agriculture
- Construction
- Mining and metals
- Processing:
 - Petrochemicals
 - Pharmaceuticals
 - Pulp and paper
- Material handling

Information Technology

- Data centers
- Telecommunications
- Networks
- Computer rooms

Energy & Utilities

- Renewable energy:
 - Solar
 - Wind
 - Hydropower
- Traditional energy:
 - Oil
 - Gas
- Smart grid
- Water and waste water

Eaton Online Catalog – find product details quickly and efficiently!

You can find comprehensive up-to-date product information at <http://de.ecat.moeller.net>

Lookup

You can search by keywords, product names, article numbers, technical data: The search understands everything and takes you straight to the product you're looking for.

Graphical navigation

Graphical representation of the fields of application and product groups.

Selection aids

Tailored to the typical expert's approach, this search aid helps you quickly find the product you need.

Data sheets

For every article the catalog can generate a technical data sheet, which you can convert to a PDF file for printing or saving with a single click.

Parts lists

From your search results you can create a parts list that you can then send to your Eaton sales partner as a query.

You can find comprehensive up-to-date information about Eaton's automation products and switchgear in our Online Catalog.



HTML data sheet; can be saved as PDF file.



Item	Qty	Photo	Article no.	Part no.	Short Desc.
1	1		111017	E5AP-221-0M001	Safety control relay 24 V DC 3-pole
2	1		226732	FAK-CONBULATOR	Complete unit
3	1		284031	8025-001M-GM-R1138	Double act. alum. flat-off-button 8xT
4	1		250060	CLM10-01 (Y130V50HZ_L230V50HZ)	Contactor 7.5kW/400V AC-operated
5	1		138110	PR25N170-02	PR255 + trip block Standard 8-16A

Parts list, e.g. for queries to Eaton Sales.



Eaton Catalogs in the App Store – all catalogs close at hand!

In order to meet the needs of increasingly mobile customers and employees, Eaton is offering a mobile solution for communication and product information.

Clearly designed shelf view

The Eaton Catalogs app offers an outstandingly clear user interface and several fully developed functions. In the form of a shelf view, the user is provided with a clear overview of Eaton's latest product catalogs. These can be leafed through on the fly or downloaded to the device – for situations when there is no Internet access. Choose for yourself which catalogs are of interest and keep up-to-date using the Update function.

Intuitive browsing, searching and finding

Users can simply browse through the catalogs with intuitive navigation ensured. A linked table of contents, thumbnail views and a rapid search function are also provided for finding information quickly and conveniently.

Linked data sheets


It is often the case that product information is required which is not available in the product catalogs. The "Eaton Catalogs" contain article numbers and type designations that are linked to the Online Catalog. This enables the user to access highly detailed production information in the form of a technical data sheet. From here other documents such as installation instructions and technical publications can be called up.

Whether on the building site, at the customer, on the train or at home – "Eaton Catalogs" make sure that all product information is close at hand.



 Now available in the
App Store

System overview

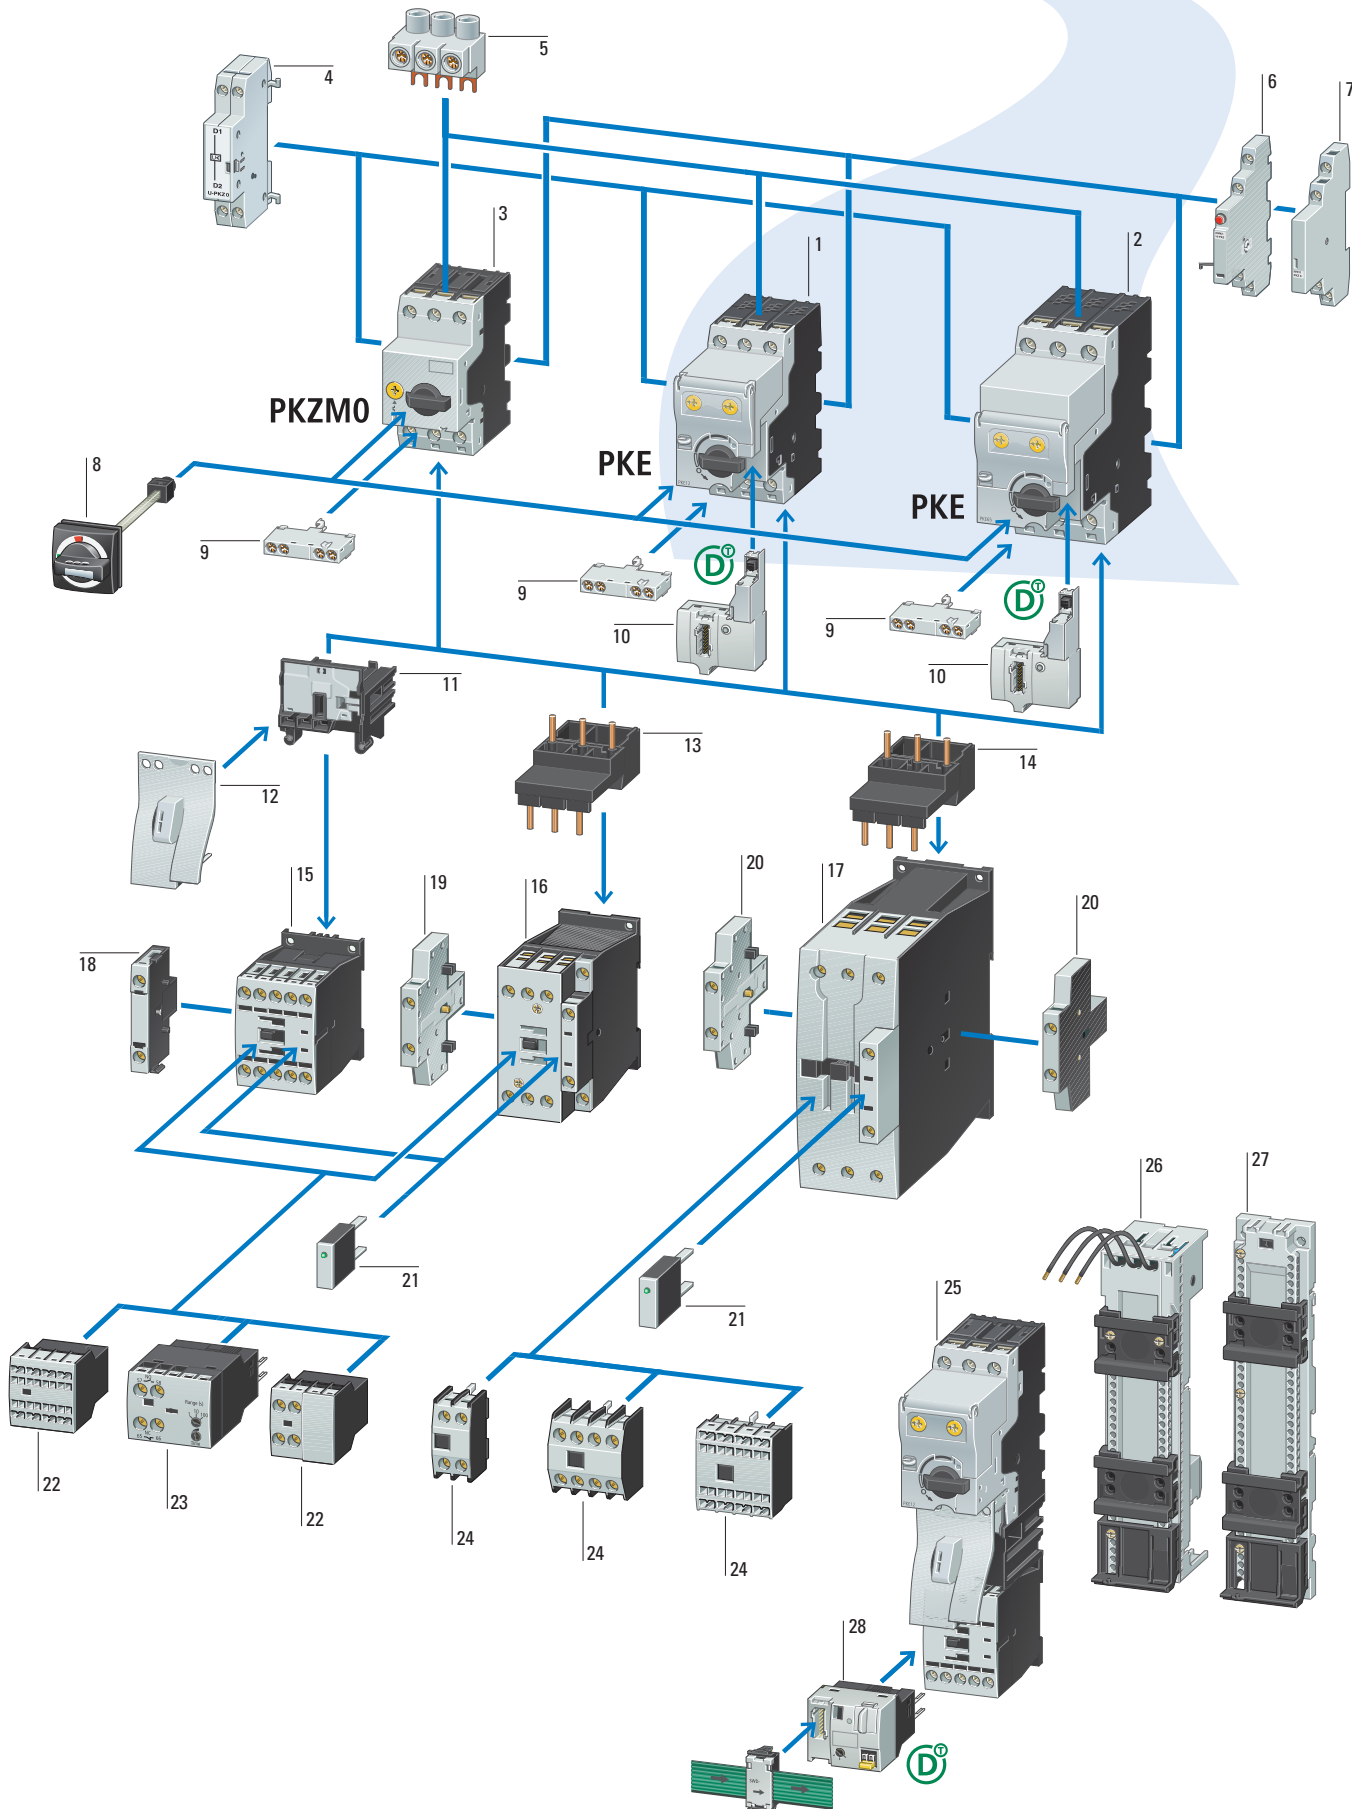

Moeller® series

Motor-protective circuit-breaker Motor-starter combinations

PKE Motor-protective circuit-breakers up to 32 A	1
→ Page 12	
PKE Motor-protective circuit-breakers up to 65 A	2
→ Page 14	
PKZM0 Motor-protective circuit-breakers	3
→ Industrial Switchgear 2011 catalog	
DILM Contactor up to 15 A	15
→ Industrial Switchgear 2011 catalog	
DILM contactor up to 38 A	16
→ Industrial Switchgear 2011 catalog	
DILM contactor up to 72 A	17
→ Industrial Switchgear 2011 catalog	
Motor-starter combinations with PKE up to 32 A	25
→ Page 26	

Accessory SmartWire-DT module

PKE module for motor-protective circuit-breakers	10
→ Page 16	
PKE module for motor-starter combinations	28
→ Page 16	

Accessory Motor-protective circuit-breakers

Voltage release	4
→ Page 18, → Page 20	
extension terminal	5
→ Page 21	
Trip indicator switches	6
→ Page 18	
Standard auxiliary contact	7
→ Page 17	
Door coupling handle	8
→ Page 23	
Standard auxiliary contact	9
→ Page 17	
Wiring set	11, 12
→ Page 24	
Electric contact module	13, 14
→ Page 24	
Side-mounting auxiliary contacts	18, 19, 20
→ Industrial Switchgear 2011 catalog	
Suppressor circuit	21
→ Industrial Switchgear 2011 catalog	
Top mounting auxiliary contacts	22, 24
→ Industrial Switchgear 2011 catalog	
Electronic timer module	23
→ Industrial Switchgear 2011 catalog	
Busbar adapter	26
→ Page 22	
Top hat rail adapter plate	27
→ Page 24	

Description

3 basic units + 5 trip blocks = current range up to 65 A



5 plug-in trip blocks up to 65 A in 2 versions



System features and operation

PKE motor-protective circuit-breakers are based on a modular design that consists of three basic devices (PKE12, PKE32, PKE65) and a series of plug-in trip blocks (PKE-XTU...) that cover five current ranges going from 0.3 to 65 A.

The plug-in trip blocks can be comfortably combined with the basic devices in order to put together a PKE motor-protective circuit-breaker, and do not require any tools for this purpose. This modular plug-in design makes it possible to quickly change current ranges by simply replacing the trip block while leaving the basic device in place.

Removing the trip block produces a visible isolating gap, with protection against contact (IP20 protection type), that separates the main current paths.

In contrast to the bimetallic motor-protective circuit-breakers normally used to date, the PKE relies on an electronic measuring and protection method. This provides a wider setting range for the adjustable rated motor current (ratio of 4:1) than the use of a bimetallic design (ratio of 1.6:1).

The use of wider current ranges reduces the need for different models by up to 80 %, minimizing engineering and design complexity and stockkeeping costs.

A selectable tripping class (CLASS 5, 10, 15, 20) for different motor startup conditions and reduced heat dissipation results in additional advantages behind this electronic unit.

Essential features

- Plug-in trip blocks of up to 65 A make it possible to quickly adjust the current range
- Electronic wide-range overload protection reduces the need for different models and makes design, engineering, and stockkeeping simpler

Communication capability and accessories

In addition to the "standard" trip blocks (PKE-XTU-...) for PKE units, "advanced" trip blocks (PKE-XTUA-...) are available so that the motor-protective circuit-breaker can be connected to the communications architecture of machines and systems with the SmartWire-DT system.

Moreover, the fact that the PKE has been fully incorporated into the xStart system means that the globally approved accessory components (such as auxiliary contacts, undervoltage releases, shunt releases, etc.) for the PKZM0 motor-protective circuit-breaker are compatible with the PKE. In fact, motor-starter combinations (consisting of a motor-protective circuit-breaker and a contactor) can continue to be put together as usual with the existing accessory components from the xStart system.

Essential features

- The data transparency that is established makes it possible to monitor machines and systems
- The use of existing, proven accessories from the xStart system reduces the need for different models

Motor-starter combinations with PKE



As usual, motor-starter combinations are made up of DILM contactors and PKE motor-protective circuit-breakers. This makes it possible to clearly assign the two contact systems to operational switching and to motor and short-circuit protection functions.

The motor-starter's individual components can be replaced without having to change the entire motor-starter, ensuring an ideal level of cost-effectiveness. In addition, a versatile range of accessory components for putting together starter combinations reduces assembly and mounting complexity while freeing up space in control panels.

The xStart system's plug-in main current wiring even makes it possible to put together motor-starter combinations of up to 15.5 A without any tools.

Motor-starter combinations with PKE units of up to 32 A make a compelling case with their high short-circuit breaking capacity of 100 kA/400 V. In addition, motor-starter combinations with DILM17 to 32 contactors meet the criteria for type 2 coordination for this level.

Essential features

- Motor-starter combinations with two contact systems provide for added safety and reduce material costs when worn components need to be replaced.
- A high short-circuit breaking capacity (100 kA/400 V) simplifies engineering and design and prevents having to use an additional back-up protection.

PKE as a circuit-breaker to EN 60947-2



In addition to use as a motor-protective circuit-breaker, the PKE can also be used as a circuit-breaker to IEC/EN 60947-2.

With the corresponding PKE-XTUCP-... trip blocks the PKE can also be used for protecting cables and wiring up to rated currents of 65 A.

In contrast to motor protection applications, a PKE used as a circuit-breaker for system protection can work with unbalanced loading caused by different loads.

The additional adjustability of the electronic short-circuit release facilitates reliable protection with various cable lengths and cable cross-sections.

Essential features

- Can be used flexibly as a motor-protective circuit-breaker or a circuit-breaker by simply replacing the trip block.
- Adjustable short-circuit protection simplifies engineering and design and guarantees that the unit can be used with various cable lengths and cross-sectional areas.

Integrated communications interface



The PKE electronic motor-protective circuit-breaker can also be integrated into automation environments with the SmartWire-DT networking system. SmartWire-DT makes it possible to send the motor-protective circuit-breaker's data directly to the controller so it can be processed or directly to an HMI so that motor feeder data can be visualized. The integration of the motor-protective circuit-breaker PKE into the system SmartWire-DT can be undertaken both for the individual PKE motor-protective circuit-breaker as well as for the PKE motor-starter combinations (MSC-DEA).

Networked PKE motor-protective circuit-breaker



The plug-in networking solution based on the SmartWire-DT PKE module (PKE-SWD-SP) makes it possible to connect a PKE with an advanced trip block to the SmartWire-DT system. This makes it possible to put together a communications-capable motor-protective circuit-breaker in no time. Both simple status data (e.g., switching state, trip reason, switch settings) and analog information (current current flow and thermal motor image) are provided with this solution. This provides a better overview of the system and additional options for optimizing processes in order to prevent process failures.

The PKE-SWD-SP PKE module can be combined with all PKE basic devices and with all PKE-XTU(W)A-... trip blocks. This results in a universal network solution for a current range of 0.3 to 65 A.

In contrast to the previous method of detecting status messages for motor-starters by means of auxiliary contacts, the status messages for motor-starter combinations with PKE and for PKE motor-protective circuit-breakers are acquired electronically via SmartWire-DT. This not only eliminates the need for additional component wiring, but also frees up space in control panels. In addition, it also prevents incorrect information resulting from poorly made contacts or broken wires.

Networked motor-starter combination with PKE up to 32 A



The SmartWire-DT PKE module (PKE-SWD-32) makes it possible to connect motor-starter combinations with a PKE of up to 32 A (MSC-DEA) to a SmartWire-DT system. The PKE module is simply plugged directly into the motor-starter combination's contactor and connected to the motor-protective circuit-breaker via an additional connection.

The circuit breaker's and monitored motor's readings and status data is acquired via the connection to the PKE motor-protective circuit-breaker. The integrated interface to the contactor coil enables the control of the motor-starter combination and reports the state. The control wiring required up to now as well as the respective digital input/output level of the PLC are no longer required.

An additional overload relay function makes it possible to ensure that the contactor will de-energize the motor in the event of an overload. The contactor can then be switched back on in an automated manner. During this process, the motor-protective circuit-breaker will remain switched on and will not have to be actuated.



Status messages / Contactor states

- Contactor state PKE
- Contactor state
- Set rated operational current (I_r)
- CLASS
- PKE trip block

The reported digital switching states for the contactor and the motor-protective circuit-breaker replace the auxiliary contacts normally used to date, as well as their wiring. Moreover, this eliminates the need for the input modules that were previously used to read these switching states.

PLCs can acquire, analyze, and check the plausibility of contactor state changes at any time.

Finally, this switching state acquisition function provides an additional way to check whether the motor-protective circuit-breaker has been configured correctly.




Specific trip indications

- Overload
- Short-circuit
- Phase failure
- Test

The use of specific trip indications renders the auxiliary contacts previously used for this type of application, as well as their wiring, unnecessary. Digital input modules for acquiring auxiliary contact states in the PLC are no longer needed as a result.

Information regarding the circuit-breaker's trip reason enables operators to troubleshoot trips in a more targeted manner.




Motor current analysis

- Maximum phase current as a % (PKE-XTU(W)A-... motor protection trip block)
- Current value for L1, L2, L3 as a % (PKE-XTU(W)ACP-... system protection trip block)

The integrated current analysis function replaces previously used accessories (e.g., current transformers) and required PLC acquisition peripherals (e.g., analog input modules) without taking up extra space in your control panel.


Indicating the current as a relative percentage value (reference value : set rated operational current I_r) makes it possible to quickly detect deviations and provides a better overview of the process.



Overload prewarning

- Thermal motor model as a %



The thermal motor model reproduces the currently calculated thermal motor load based on the switching state, the current flow, and the tripping characteristic in the PKE. A fixed switching threshold for overload tripping (110 % thermal motor load) based on the motor model makes it possible to determine when the PKE will trip due to a thermal motor overload before it happens. This makes it possible to identify moments when the process is about to be interrupted and take appropriate preventive measures.





Overload relay function





Overload relay functions that can be selected via SmartWire-DT make it possible to ensure that the contactor will be automatically switched off in the event of an overload when working with DOL starters with a SmartWire-DT connection. Since the contactor can be switched back on automatically, the motor-protective circuit-breaker does not need to be actuated.

Ordering

Motor rating	Motor full-load current					Setting range of overload releases	 Basic device with standard knob Basic device with AK lockable rotary handle	For use with	
	AC-3								
	220 V	380 V	440 V	500 V	660 V				
	230 V	400 V			690 V				
	240 V	410 V							
P	I	I	I	I	I		Part no. Article no.	Price see price list	Std. pack
kW	A	A	A	A	A				









Coordination type "1" and "2"						Setting range of overload releases	Basic device with standard knob	Std. pack	For use with
0.06	0.37	-	-	-	-				
0.09	0.54	0.31	-	-	-	0.3 - 1.2	PKE12 121721	1 off	PKE12 basic device
0.12	0.72	0.41	0.37	0.33	-		PKE12/AK 158241		
0.18	1.04	0.6	0.54	0.48	0.35				
0.25	-	0.8	0.76	0.7	0.5				
0.37	-	1.1	1.02	0.9	0.7				
0.55	-	-	-	-	0.9				
0.75	-	-	-	-	1.1				
0.18	1.04	-	-	-	-	1 - 4	PKE12 121721	1 off	PKE12 basic device
0.25	1.4	-	-	-	-		PKE12/AK 158241		PKE32 basic device
0.37	2	1.1	1.02	-	-				
0.55	2.7	1.5	1.39	1.2	-				
0.75	3.2	1.9	1.68	1.5	1.1				
1.1	-	2.6	2.41	2.1	1.5				
1.5	-	3.6	3.28	2.9	2.1				
2.2	-	-	-	4	2.9				
3	-	-	-	-	3.8				
0.75	3.2	-	-	-	-	3 - 12	PKE12 121721	1 off	PKE12 basic device
1.1	4.6	-	-	-	-		PKE12/AK 158241		PKE32 basic device
0.15	6.3	3.6	3.3	-	-				
2.2	8.7	5	4.6	4	-				
3	11.5	6.6	6	5.3	3.8				
4	-	8.5	7.7	6.8	4.9				
5.5	-	11.3	10.2	9	6.5				
7.5	-	-	-	-	8.8				
2.2	8.7	-	-	-	-	8 - 32	PKE32 121722	1 off	PKE32 basic device
3	11.5	-	-	-	-		PKE32/AK 158245		
4	14.8	8.5	-	-	-				
5.5	19.6	11.3	10.2	9	-				
7.5	26.4	15.2	13.8	12.1	8.8				
11	-	21.7	19.8	17.4	12.6				
15	-	29.3	26.6	23.4	17				
18.5	-	-	-	28.9	20.9				
22	-	-	-	-	23.8				
30	-	-	-	-	32				

Rated uninterrupted current	Setting range		Basic device with standard knob	For use with	
	Overload releases	Short-circuit releases			
I_u	I_r	I_{rm}	Part no. Article no.	Price see price list	Std. pack
A					
36	15 - 36	75 - 288	PKE32 121722	1 off	PKE32 basic device






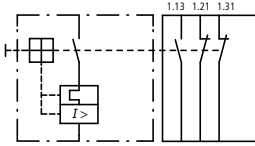

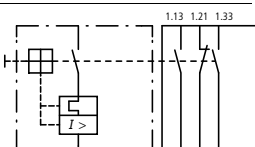




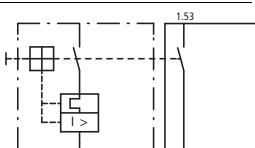
 Trip block motor protection Standard	Part no. Article no.	Price see price list	Std. pack	For use with Connection to SmartWire-DT with PKE-SWD-32 or PKE-SWD-SP	  Trip block motor protection Advanced	Part no. Article no.	Price see price list	Std. pack	 Complete device with standard knob Complete device with AK lockable rotary handle	Part no. Article no.	Price see price list	Std. pack

PKE-XTU-1,2 121723	1 off	PKE12 basic device	PKE-XTUA-1,2 121727	1 off	PKE12/XTU-1,2 121731	1 off
					PKE12/AK/XTU-1,2 158242	
PKE-XTU-4 121724	1 off	PKE12 basic device PKE32 basic device	PKE-XTUA-4 121728	1 off	PKE12/XTU-4 121732	1 off
					PKE12/AK/XTU-4 158244	
PKE-XTU-12 121725	1 off	PKE12 basic device PKE32 basic device	PKE-XTUA-12 121729	1 off	PKE12/XTU-12 121733	1 off
					PKE12/AK/XTU-12 158243	
PKE-XTU-32 121726	1 off	PKE32 basic device	PKE-XTUA-32 121730	1 off	PKE32/XTU-32 121734	1 off
					PKE32/AK/XTU-32 158246	

Trip block system protection Standard	Part no. Article no.	Price see price list	Std. pack	For use with Connection to SmartWire-DT with PKE-SWD-32 or PKE-SWD-SP	Trip block system protection Advanced	Part no. Article no.	Price see price list	Std. pack	Complete device with standard knob	Part no. Article no.	Price see price list	Std. pack
PKE-XTUCP-36 153164			1 off	PKE32 basic device	PKE-XTUACP-36 168795			1 off	PKE32/XTUCP-36 168972			1 off

Description	For use with	Part no. Article no.	Price see price list	Std. pack
SmartWire-DT PKE module (motor-starter combinations)				
For connecting the motor-starter combination to SmartWire-DT, "expanded" 24 VDC version (MSC-DEA...) up to 15 kW.				
 <p>Surface-mounting to contactors. One module per contactor and PKE necessary. Additional SWD contactor module required for actuation of reversing starter. 1 electrical interlock for the surface mounting of reversing starters. 1-0-A switch for manual or automatic operation. Selectable overload relay function (ZMR) for switching off the contactor on overload. Wiring sets DILM 12-XRL and PKZM0-XRM12 cannot be used. For current consumption of the contactor coils > 3 A (UL/CSA > 2 A) use additional power feeder module. A2 connections must not be bridged.</p> <p>Connecting cable between module and trip block PKE-XTUA-... included as standard.</p> <p>Messages Switch position contactor/PKE/1-0-A switch Motor current in % Thermal motor image in % Trip indications (Overload, Short-circuit,...) Set value of overload releases Set time lag (CLASS) Part no. of trip block</p> <p>Commands Contactor actuation Activation Overload relay function (ZMR)</p>	DILM(C)7... - DILM(C)32 MSC-DEA	PKE-SWD-32 126895 		4 off  
SmartWire-DT PKE (motor-protective circuit-breaker)				
For connecting the PKE motor-protective circuit-breaker with trip block to SmartWire-DT				
 <p>Fitted on PKE motor-protective circuit-breaker</p> <p>Messages Contactor state PKE Motor current in % Thermal motor image in % Trip indications (Overload, Short-circuit,...) Set value of overload releases Set time lag (CLASS) Part no. of trip block</p> <p>Commands Remote disconnection of motor-protective circuit-breaker</p>	PKE12 PKE32 PKE65	PKE-SWD-SP 150614 		1 off  

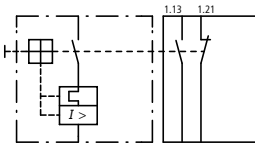Information relevant for export to North America   → Page 35

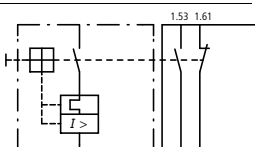Contacts	Contact diagram	Contact sequence	Connection technique	For use with	Part no. Article no.	Price see price list	Std. pack
N/O = Normally open N/C = Normally closed							
Standard auxiliary contact							
	1 N/O 1 N/C			Screw terminals	PKZM01 PKZM0 PKZM4 PKZM0-T PKM0 PKE	NHI11-PKZ0¹⁾ 072896	5 off 
	1 N/O 2 N/C					NHI12-PKZ0¹⁾ 072895	
	2 N/O 1 N/C					NHI21-PKZ0¹⁾ 072894	
	1 N/O 1 N/C					NHI-E-11-PKZ0²⁾ 082882	
	1 N/O -					NHI-E-10-PKZ0²⁾ 082884	

Hinweise ¹⁾ Can be fitted to the right of motor-protective circuit-breakers, transformer-protective circuit-breakers, motor-protective circuit-breakers for starter combinations.

Can be combined with:
AGM, NHI-E-... trip-indicating auxiliary contact













²⁾ Can be retrofitted to motor-protective circuit-breakers, transformer-protective circuit-breakers, motor-protective circuit-breakers for starter combinations from serial number 01. 45 mm (PKZM0 and PKZM01) or 55 mm (PKZM4) widths of the motor-protective circuit-breakers remain unchanged.

Information relevant for export to North America  → Page 35
























Contacts	Contact diagram	Contact sequence	For use with
N/O = Normally open N/C = Normally closed			
Trip-indicating auxiliary contacts			
2 x 1 N/O			PKZM0 PKZM4 PKZM0-T PKM0 PKZM01 PKE
2 x 1 N/C			PKZM0 PKZM4 PKZM0-T PKM0 PKZM01 PKE
Shunt release			
			PKZM0 PKZM4 PKZM0-T PKM0 PKZM01 PKE
			PKZM0 PKZM4 PKZM0-T PKM0 PKZM01 PKE
Undervoltage release			
			PKZM0 PKZM4 PKZM0-T PKM0 PKZM01 PKE
Current limiter			
Motor-protective circuit-breaker, non-auto-protected in order to increase switching capacity			PKZM0 PKZM4 PKE

Information relevant for export to North America → Page 35















Part no. Article no.	Price see price list	Std. pack	Notes
AGM2-10-PKZ0 072898		2 off 	Can be retrofitted on the right side of motor-protective circuit-breakers Differential status indication a) General trip indication (overload) b) Short-circuit release Short-circuits indicated locally by means of a red indicator that can be manually reset Can be combined with auxiliary contact NH111-PKZ0 NH112-PKZ0 NH121-PKZ0 NHI-E-...
AGM2-01-PKZ0 072899			
A-PKZ0(230V50HZ) 073187		2 off 	Can be fitted to the left of: Motor-protective circuit-breakers Cannot be combined with: U-PKZ0 undervoltage release DC: Intermittent operation 5 s For PKE, only A-PKZ0 or U-PKZ0... with a serial number of 02 or higher can be retrofitted.
A-PKZ0(24VDC) 073200			
U-PKZ0(230V50HZ) 073135		2 off 	Can be fitted to the left of: Motor-protective circuit-breakers Cannot be combined with: A-PKZ0 shunt release When combined with circuit-breaker, can be used as emergency-stop device to IEC/EN 60204. For PKE, only A-PKZ0 or U-PKZ0... with a serial number of 02 or higher can be retrofitted.
CL-PKZ0 082881		1 off 	Max. rated operational voltage $U_n = 690$ V, rated uninterrupted current $I_n = 63$ A Can be used for individual and group protection For group protection and in combination with PKZM4, order additional BK25/3 incoming terminal if required. Mounting next to or behind the motor-protective circuit-breaker. PKZM0: 16 - 32 A, 150 kA/440 V PKZM4: 16 - 63 A, 100 kA/400 V PKZM4: 16 - 63 A, 10 kA/690 V










Actuating voltage	Part no. Article no.	Price see price list	Std. pack	Part no. Article no.	Price see price list	Std. pack	Notes	
Shunt release, Undervoltage release								
AC								
Standard voltage								
24 V 50 Hz	A-PKZ0(24V50HZ) 073181		2 off  	U-PKZ0(24V50HZ) 073129		2 off  	For PKE, only A-PKZ0 or U-PKZ0... with a serial number of 02 or higher can be retrofitted.	
110 V 50 Hz	A-PKZ0(110V50HZ) 073184			U-PKZ0(110V50HZ) 073132				
220 V 50 Hz	A-PKZ0(220V50HZ) 073186			U-PKZ0(220V50HZ) 073134				
230 V 50 Hz	A-PKZ0(230V50HZ) 073187			U-PKZ0(230V50HZ) 073135				
240 V 50 Hz	A-PKZ0(240V50HZ) 073188			U-PKZ0(240V50HZ) 073136				
380 V 50 Hz	A-PKZ0(380V50HZ) 073189			U-PKZ0(380V50HZ) 073137				
400 V 50 Hz	A-PKZ0(400V50HZ) 073190			U-PKZ0(400V50HZ) 073138				
415 V 50 Hz	A-PKZ0(415V50HZ) 073191			U-PKZ0(415V50HZ) 073139				
120 V 60 Hz	A-PKZ0(120V60HZ) 073195			U-PKZ0(120V60HZ) 073143				
240 V 60 Hz	A-PKZ0(240V60HZ) 073198			U-PKZ0(240V60HZ) 073146				
440 V 60 Hz	A-PKZ0(440V60HZ) 082164			U-PKZ0(440V60HZ) 082161				
480 V 60 Hz	A-PKZ0(480V60HZ) 073199			U-PKZ0(480V60HZ) 073147				
Non-standard voltages apart from previously stated standard voltages								
...V 50 Hz (24 - 500 V)	A-PKZ0(*V50HZ) 982165		2 off  	U-PKZ0(*V50HZ) 982162		2 off  		For PKE, only A-PKZ0 or U-PKZ0... with a serial number of 02 or higher can be retrofitted. The article no. results from combining the part no. and the actuating voltage. With non-standard voltages the required actuating voltage from the defined range (...-...V) must be stated. Minimum order quantity: 10 units.
...V 60 Hz (24 - 600 V)	A-PKZ0(*V60HZ) 982166			U-PKZ0(*V60HZ) 982163				
DC								
Standard voltage								
24 V DC	A-PKZ0(24VDC) 073200		2 off  	U-PKZ0(24VDC) 157862		2 off  	For PKE, only A-PKZ0 or U-PKZ0... with a serial number of 02 or higher can be retrofitted.	
110 V DC	A-PKZ0(110VDC) 073203			-				

Information relevant for export to North America   → Page 35


























	Circuit-breaker Number	Length mm	Unit width mm	Part no. Article no.	Price see price list	Std. pack	Notes
Three-phase commoning link							
Protected against accidental contact, short-circuit proof, $U_e = 690\text{ V}$, $I_u = 63\text{ A}$ Can be extended by rotating by installation							
For PKZM0-... or PKE without side mounted auxiliary contacts or shunt releases							
	2	90	45	B3.0/2-PKZO 063961		10 off  	For parallel power feed to several motor-protective circuit-breakers on terminals 1, 3, 5
	3	135	45	B3.0/3-PKZO 232289			
	4	180	45	B3.0/4-PKZO 063960			
	5	225	45	B3.0/5-PKZO 232290			
Attached on the right, for motor-protective circuit-breakers, with an auxiliary contact or trip-indicating auxiliary contact							
	2	99	45 + 9	B3.1/2-PKZO 044945		10 off  	For parallel power feed to several motor-protective circuit-breakers on terminals 1, 3, 5
	3	153	45 + 9	B3.1/3-PKZO 044946			
	4	207	45 + 9	B3.1/4-PKZO 044947			
	5	261	45 + 9	B3.1/5-PKZO 044948			
for PKZM0-... or PKE: attached with an auxiliary contact and a trip-indicating auxiliary contact on the right or attached on the left with a shunt release							
	2	108	45 + 18	B3.2/2-PKZO 063963		10 off  	For parallel power feed to several motor-protective circuit-breakers on terminals 1, 3, 5
	4	234	45 + 18	B3.2/4-PKZO 063959			
For use with							
Part no. Article no.							
Price see price list							
Std. pack							
Notes							
Shroud for unused terminals							
Protection against direct contact.							
	For covering unused terminals on three-phase commoning link B3...-PKZO			H-B3-PKZO 032721		20 off  	-
Incoming terminal							
	PKZM0 PKE			BK25/3-PKZO 032720		5 off  	For three-phase commoning link, protected against accidental contact, $U_e = 690\text{ V}$, $I_u = 63\text{ A}$ For conductor cross-sections: 2.5 - 25 mm ² stranded 2.5 - 16 mm ² flexible with ferrules AWG 14 - 6, for use on terminals 1, 3, 5
	PKE32/XTUCP-36 PKE32 + PKE-XTUCP-36 PKE32 + PKE-XTUACP-36			BK25/3-PKZO-U 292886		10 off	for three-phase commoning link, protected against accidental contact, $U_e = 690\text{ V}$, $I_u = 63\text{ A}$ For conductor cross-sections: 2.5 - 25 mm ² stranded 2.5 - 16 mm ² Flexible with ferrule AWG 14 - 6, usable on terminals 2, 4, 6


Information relevant for export to North America   → Page 35

	Rated operational voltage U_e V	Terminal capacity	Adapter width mm	DIN rail Quantity	For use with	Part no. Article no.	Price see price list	Std. pack	Notes
Busbar adapters									
For fitting to flat Cu-busbars with 60 mm between busbar centres, suitable for 5 mm and 10 mm busbar thickness									
Rated operational current 25 A									
For reversing starters									
	690	AWG 12 (4 mm ²)	90	1	PKZM0, PKE + 2 x DILM7-01 PKZM0, PKE + 2 x DILM9-01 PKZM0, PKE + 2 x DILM12-01 MSC-R-0,25- M7... - MSC-R- 12-M12...	BBA0R-25 101453		2 off  	In combination with individual components PKZM0, PKE and DILM DOL reversing starter use PKZM0-XRM12. Completely mounted and tested combination with MSC-R...
For DOL Starter									
	690	AWG 12 (4 mm ²)	45	1	PKZM0, PKE + DILM7 PKZM0, PKE + DILM9 PKZM0, PKE + DILM12 PKZM0, PKE + DILM15 MSC-D-0,25- M7... - MSC-D- 16-M15...	BBA0-25 101451		4 off  	In combination with individual components PKZM0, PKE and DILM. Use with direct starter set PKZM0-XMD12. Completely mounted and tested combination with MSC-D...
For soft starter									
	690	AWG 12 (4 mm ²)	45	1	PKZM0, PKE + DS7...004N... PKZM0, PKE + DS7...007N... PKZM0, PKE + DS7...009N... PKZM0, PKE + DS7...012N...	BBA0L-25 142526		1 off	-
Rated operational current 32 A									
For reversing starters									
	690	AWG 10 (6 mm ²)	90	3	PKZM0, PKE + 2 x DILM17-01 PKZM0, PKE + 2 x DILM25-01 PKZM0, PKE + 2 x DILM32-01	BBA0R-32 101454		2 off  	In combination with individual components PKZM0, PKE and DILM use electrical contact module PKZM0 XM32DE and reversing wiring kit DILM 32-XRL. Completely mounted and tested combination with MSC-R...
For DOL Starter									
	690	AWG 10 (6 mm ²)	45	2	PKZM0, PKE + DILM17 PKZM0, PKE + DILM25 PKZM0, PKE + DILM32	BBA0-32 101452		4 off  	In combination with individual components PKZM0, PKE and DILM use electrical contact module PKZM0-XM32DE. Completely mounted and tested combination with MSC-D...
For soft starter									
	690	AWG 10 (6 mm ²)	45	2	PKZM0, PKE + DS7...016N... PKZM0, PKE + DS7...024N... PKZM0, PKE + DS7...032N...	BBA0L-32 142527		1 off	-






	For use with	Part no. Article no.	Price see price list	Std. pack	Notes
Door coupling handle					
IEC: IP65, UL/CSA Type: 4X, 12					
	For use as main switch to IEC/EN 60204	Black	PKE	PKE-XH 142416	1 off  Plug-in extension shaft PKZ0-XAH can be cut to desired length for mounting depths of 100 – 240 mm. Carrier with extension shaft included in delivery. With ON/OFF switch position and "+" (tripped), lockable With 3 padlocks, 4 – 8 mm hasp.
	For use as a main switch with Emergency-Stop function, to EN 60204	Red-yellow	PKE	PKE-XRH 142417	
	For use as a main switch to EN 60204 in MCC power distribution systems and with PKE installed when rotated by 90°	Black	PKE	PKE-XH-MCC 142418	
	For use as a main switch with Emergency-Stop function to EN 60204 in MCC power distribution systems and with PKE installed when rotated by 90°	Red-yellow	PKE	PKE-XRH-MCC 142419	
Telescopic adapters					
with 45 mm top-hat rail to IEC/EN 60715 for compensation of the mounting depth of rear mounted devices in CI-K... enclosures and cabinets					
	Infinitely adjustable from 75 to 115 mm through scales		PKZM0 PKE	M22-TA 226161	1 off 
Rotary handle, lockable					
	for locking motor-protective circuit-breakers PKZM0, PKZM4 and PKE as a main switch in compliance with EN 60204 Can be padlocked in the "0" position with a padlock Hasp thickness: 3 – 6.35 mm		Cannot be combined with VHI-PKZ0.	AK-PKZ0 030851	5 off 
Mounting angle bracket					
	For screw fixing to mounting plate		-	PKE32-XMB 134837	20 off 
Documentation					
Manual					
	PKE12, 32 and 65 motor-protective circuit-breaker, overload monitoring of Ex e motors		-	MN03402004Z-DE/EN 134836	1 off German/English
Selector slide					
	Engineering aid for electronic motor-starters with PKE or ZEB		-	SA04205001Z-EN 153375	1 off -

Information relevant for export to North America  → Page 35

For use with	Part no. Article no.	Price see price list	Std. pack	Notes
Wiring set				
DOL starter				
	PKZM0, PKE + DILM7 PKZM0, PKE + DILM9 PKZM0, PKE + DILM12 PKZM0, PKE + DILM15 DS7-34...SX004... DS7-34...SX007... DS7-34...SX009... DS7-34...SX012...	PKZM0-XDM12 283149	1 off  	Consists of: • Mechanical connection element for PKZM0, PKE, and contactor • Main current wiring between PKZM0, PKE, and contactor with tool-less plug connection • Cable routing Use as auxiliary contact DILA-XHIT... Cannot be combined with NHI-E...PKZ0-C. U _e ≤ 415 V
	PKZM0, PKE + DILM17 PKZM0, PKE + DILM25 PKZM0, PKE + DILM32	PKZM0-XDM32 283153	1 off  	Consists of: • Top hat rail adapter plate • Main current wiring between PKZ, PKE, and contactor
	PKZM4, PKE65 + DILM40 PKZM4, PKE65 + DILM50 PKZM4, PKE65 + DILM65	PKZM4-XDM65 101053	1 off  	
Reversing starter				
	PKZM0, PKE + DILM7-01 PKZM0, PKE + DILM9-01 PKZM0, PKE + DILM12-01	PKZM0-XRM12 283185	1 off  	Consists of: • Mechanical connection element for PKZM0, PKE, and contactor • Main current wiring for reversing starter with tool-less plug connection • Control cables for electrical interlock with tool-less plug connection: – K1M: A1 -K2M: 21 – K1M: 21 -K2M: A1 – K1M: A2 -K2M: A2 • Cable routing Use as auxiliary contact DILA-XHIT... Not combinable with AGM-PKZ0. U _e ≤ 415 V
	PKZM0, PKE + DILM17 PKZM0, PKE + DILM25 PKZM0, PKE + DILM32	PKZM0-XRM32 283189	1 off  	Consists of: • Top hat rail adapter plate • Main current wiring for reversing starter
Electric contact module				
	PKZM0, PKE + DILM17 PKZM0, PKE + DILM25 PKZM0, PKE + DILM32 DS7-34...SX016... DS7-34...SX024... DS7-34...SX032...	PKZM0-XM32DE 239349	5 off  	• Use main current wiring between PKZM0, PKE, and contactor • only in combination with busbar adapter or top hat rail adapter plate
	PKZM4, PKE65 + DILM40 PKZM4, PKE65 + DILM50 PKZM4, PKE65 + DILM65	PKZM4-XM65DE 101056	5 off  	• Main current wiring between PKZM4, PKE65 and contactor
Top hat rail adapter plate				
	PKZM0-XDM12 PKZM0-XRM12	PKZM0-XC45 283132	4 off	Comprised of: • 45 mm wide adapter plate
	PKZM4, PKE65 + DILM40 PKZM4, PKE65 + DILM50 PKZM4, PKE65 + DILM65	PKZM4-XC55/2 101054	4 off	Comprised of: • 55 mm wide adapter plate • Connection cams for further plates • For use with reversing and star-delta starters
	PKZM0, PKE + DS7...004N... PKZM0, PKE + DS7...007N... PKZM0, PKE + DS7...009N... PKZM0, PKE + DS7...012N...	PKZM0-XC45L 142529	1 off	Consists of: • 45 mm wide adapter plate
	PKZM0, PKE + DS7...016N... PKZM0, PKE + DS7...024N... PKZM0, PKE + DS7...032N...	PKZM0-XC45L/2 142570	1 off	Consists of: • 45 mm wide adapter plate

Motor rating P kW	Motor full-load current AC-3			Setting range Overload releases 	Standard motor-starter Actuating voltage 230 V 50 Hz Part no. Article no.	Price see price list	Std. pack
	220 V	380 V	415 V				
	230 V	400 V					
	240 V						
	$I_q = 100 \text{ kA}$	$I_q = 100 \text{ kA}$	$I_q = 50 \text{ kA}$				
	I	I	I				
	A	A	A				


Type of coordination "1"

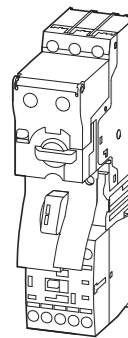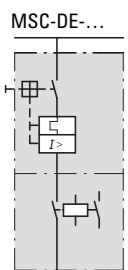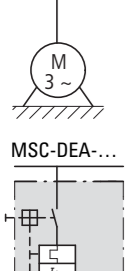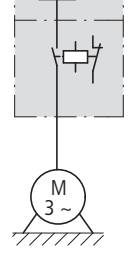Type of coordination "1"	Motor rating	Motor full-load current	Setting range	Standard motor-starter	Price	Std. pack
	0.06	0.37	-	MSC-DE-1,2-M7(230V50HZ) 121735	-	1 off
	0.09	0.54	0.31			
	0.12	0.72	0.41			
	0.18	1.04	0.6			
	0.25	-	0.8			
	0.37	-	1.1			
	0.18	1.04	-			
	0.25	1.4	-			
	0.37	2	1.1			
	0.55	2.7	1.5			
	0.75	3.2	1.9	MSC-DE-4-M7(230V50HZ) 121737	-	1 off
	1.1	-	2.6			
	1.5	-	3.6			
	0.75	3.2	-			
	1.1	4.6	-			
	1.5	6.3	3.6			
	2.2	-	5			
	3	-	6.6			
	0.75	3.2	-			
	1.1	4.6	-			
	1.5	6.3	3.6	MSC-DE-12-M7(230V50HZ) 121739	-	1 off
	2.2	-	5			
	3	-	6.6			
	0.75	3.2	-			
	1.1	4.6	-			
	1.5	6.3	3.6			
	2.2	8.7	5			
	3	-	6.6			
	4	-	8.5			
	0.75	3.2	-			
	1.1	4.6	-	MSC-DE-12-M9(230V50HZ) 121741	-	1 off
	1.5	6.3	3.6			
	2.2	8.7	5			
	3	11.5	6.6			
	4	-	8.5			
	0.75	3.2	-			
	1.1	4.6	-			
	1.5	6.3	3.6			
	2.2	8.7	5			
	3	11.5	6.6			
	4	-	8.5	MSC-DE-12-M12(230V50HZ) 121743	-	1 off
	5.5	-	11.3			
	0.75	3.2	-			
	1.1	4.6	-			
	1.5	6.3	3.6			
	2.2	8.7	5			
	3	11.5	6.6			
	4	-	8.5			
	5.5	-	11.3			


Standard motor-starter Actuating voltage 24 V DC	Price	Std. pack	Extended motor-starter Actuating voltage 24 V DC	Price	Std. pack	Notes
Part no. Article no.	see price list		Part no. Article no.	see price list		
MSC-DE-1,2-M7(24VDC) 121736		1 off	MSC-DEA-1,2-M7(24VDC) 121753		1 off	The DOL starter (complete devices) consists of a PKE motor-protective circuit-breaker and a DILM contactor. With the adapter-less top-hat rail mounting of starters up to 15 A, only the motor-protective circuit-breaker on the top-hat rail requires an adapter. The contactors are provided with mechanical support via a mechanical connection element. Control wire guide with max. 6 conductors up to 2.5 mm external diameter or 4 conductors up to 3.5 mm external diameter. From 16 A, the motor-protective circuit-breaker and contactor are mounted on the top-hat rail adapter plate. The connection of the main circuit between PKE and contactor is established with electrical contact modules. When using DILA-XHIT... auxiliary contacts with MSC-DE... DOL starters, the plug-in electrical connectors can be removed without removing the front-mounted auxiliary contact. Cannot be combined with NHI-E...PKZ0-C. MSC-DEA... DOL starters are prepared for communications via SmartWire-DT. In order to be used this way, they first need to be expanded with the PKE-SWD-32 communications module.
MSC-DE-4-M7(24VDC) 121738			MSC-DEA-4-M7(24VDC) 121754			
MSC-DE-12-M7(24VDC) 121740			MSC-DEA-12-M7(24VDC) 121755			
MSC-DE-12-M9(24VDC) 121742			MSC-DEA-12-M9(24VDC) 121756			
MSC-DE-12-M12(24VDC) 121744			MSC-DEA-12-M12(24VDC) 121757			

Motor rating	Motor full-load current							Setting range Overload releases
	AC-3		415 V	440 V	500 V	500 V mit CL-PKZ0	660 V 690 V	
	220 V 230 V 240 V	380 V 400 V				$I_q = 50 \text{ kA}$		
	$I_q = 100 \text{ kA}$	$I_q = 100 \text{ kA}$	$I_q = 65 \text{ kA}$	$I_q = 65 \text{ kA}$	$I_q = 10 \text{ kA}^{(1)}$	$I_q = 100 \text{ kA}$	$I_q = 3 \text{ kA}$	
P	l	l	l	l	l	l	l	
kW	A	A	A	A	A	A	A	


Type of coordination "2"

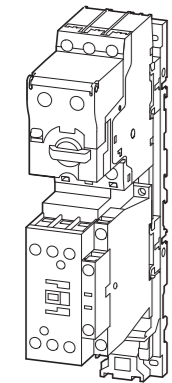

MSC-DE-...




MSC-DEA-...





Motor rating (kW)	0.06	0.09	0.12	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2	3	4	5.5	7.5	11	15	18.5	22	30
0.06	0.37	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.09	0.54	0.31	0.31	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.12	0.72	0.41	0.41	0.37	0.33	0.33	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.18	1.04	0.6	0.6	0.54	0.48	0.48	0.35	-	-	-	-	-	-	-	-	-	-	-	-	-
0.25	-	0.8	0.8	0.76	0.7	0.7	0.5	-	-	-	-	-	-	-	-	-	-	-	-	-
0.37	-	1.1	1.1	1.02	0.9	0.9	0.7	-	-	-	-	-	-	-	-	-	-	-	-	-
0.55	-	-	-	-	-	-	0.9	-	-	-	-	-	-	-	-	-	-	-	-	-
0.75	-	-	-	-	-	-	1.1	-	-	-	-	-	-	-	-	-	-	-	-	-
1.1	1.04	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.5	1.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2.2	2	1.1	1.1	1.02	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3	2.7	1.5	1.5	1.39	1.2	1.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
4	3.2	1.9	1.9	1.68	1.5	1.5	1.1	-	-	-	-	-	-	-	-	-	-	-	-	-
5.5	-	2.6	2.6	2.41	2.1	2.1	1.5	-	-	-	-	-	-	-	-	-	-	-	-	-
7.5	-	3.6	3.6	3.28	2.9	2.9	2.1	-	-	-	-	-	-	-	-	-	-	-	-	-
11	-	-	-	-	4	4	2.9	-	-	-	-	-	-	-	-	-	-	-	-	-
15	-	-	-	-	-	-	3.8	-	-	-	-	-	-	-	-	-	-	-	-	-
18.5	0.75	3.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
22	1.1	4.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
30	1.5	6.3	3.6	3.6	3.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	2.2	8.7	5	5	4.6	4	4	-	-	-	-	-	-	-	-	-	-	-	-	-
	3	11.5	6.6	6.6	6	5.3	3.8	-	-	-	-	-	-	-	-	-	-	-	-	-
	4	-	8.5	8.5	7.7	6.8	4.9	-	-	-	-	-	-	-	-	-	-	-	-	-
	5.5	-	11.3	11.3	10.2	9	6.5	-	-	-	-	-	-	-	-	-	-	-	-	-
	7.5	-	-	-	-	-	8.8	-	-	-	-	-	-	-	-	-	-	-	-	-
	11	8.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	15	11.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	22	14.8	8.5	8.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	30	19.6	11.3	11.3	10.2	9	9	-	-	-	-	-	-	-	-	-	-	-	-	-
	36	26.4	15.2	15.2	13.8	12.1	8.8	-	-	-	-	-	-	-	-	-	-	-	-	-
	45	-	21.7	21.7	19.7	17.4	12.6	-	-	-	-	-	-	-	-	-	-	-	-	-
	55	-	29.3	29.3	26.6	23.4	17	-	-	-	-	-	-	-	-	-	-	-	-	-
	70	-	-	-	-	-	20.9	-	-	-	-	-	-	-	-	-	-	-	-	-
	90	-	-	-	-	-	23.8	-	-	-	-	-	-	-	-	-	-	-	-	-
	110	8.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	150	11.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	200	14.8	8.5	8.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	250	19.6	11.3	11.3	10.2	9	9	-	-	-	-	-	-	-	-	-	-	-	-	-
	315	26.4	15.2	15.2	13.8	12.1	8.8	-	-	-	-	-	-	-	-	-	-	-	-	-
	400	-	21.7	21.7	19.7	17.4	12.6	-	-	-	-	-	-	-	-	-	-	-	-	-
	500	-	29.3	29.3	26.6	23.4	17	-	-	-	-	-	-	-	-	-	-	-	-	-
	630	-	-	-	-	-	20.9	-	-	-	-	-	-	-	-	-	-	-	-	-
	800	-	-	-	-	-	23.8	-	-	-	-	-	-	-	-	-	-	-	-	-
	1000	8.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	1250	11.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	1600	14.8	8.5	8.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	2000	19.6	11.3	11.3	10.2	9	9	-	-	-	-	-	-	-	-	-	-	-	-	-
	2500	26.4	15.2	15.2	13.8	12.1	8.8	-	-	-	-	-	-	-	-	-	-	-	-	-
	3150	-	21.7	21.7	19.7	17.4	12.6	-	-	-	-	-	-	-	-	-	-	-	-	-
	4000	-	29.3	29.3	26.6	23.4	17	-	-	-	-	-	-	-	-	-	-	-	-	-
	5000	-	-	-	-	-	20.9	-	-	-	-	-	-	-	-	-	-	-	-	-
	6300	-	-	-	-	-	23.8	-	-	-	-	-	-	-	-	-	-	-	-	-



Standard motor-starter Actuating voltage 230 V 50 Hz		Std. pack	Standard motor-starter Actuating voltage 24 V DC		Std. pack	Extended motor-starter Actuating voltage 24 V DC		Std. pack	Notes
Part no. Article no.	Price see price list		Part no. Article no.	Price see price list		Part no. Article no.	Price see price list		
MSC-DE-1,2-M17(230V50HZ)⁽¹⁾ 168800		1 off	MSC-DE-1,2-M17(24VDC)⁽¹⁾ 168801		1 off	MSC-DEA-1,2-M17(24VDC)⁽¹⁾ 168804		1 off	<p>The DOL starter (complete devices) consists of a PKE motor-protective circuit-breaker and a DILM contactor.</p> <p>From 16 A, the motor-protective circuit-breaker and contactor are mounted on the top-hat rail adapter plate.</p> <p>The connection of the main circuit between PKE and contactor is established with electrical contact modules.</p> <p>MSC-DEA... DOL starters are prepared for communications via SmartWire-DT. In order to be used this way, they first need to be expanded with the PKE-SWD-32 communications module.</p>
MSC-DE-4-M17(230V50HZ) 168802			MSC-DE-4-M17(24VDC) 168803			MSC-DEA-4-M17(24VDC) 168805			
MSC-DE-12-M17(230V50HZ) 121745			MSC-DE-12-M17(24VDC) 121746			MSC-DEA-12-M17(24VDC) 121758			
MSC-DE-32-M17(230V50HZ) 121747			MSC-DE-32-M17(24VDC) 121748			MSC-DEA-32-M17(24VDC) 121759			
MSC-DE-32-M25(230V50HZ) 121749			MSC-DE-32-M25(24VDC) 121750			MSC-DEA-32-M25(24VDC) 121760			
MSC-DE-32-M32(230V50HZ) 121751			MSC-DE-32-M32(24VDC) 121752			MSC-DEA-32-M32(24VDC) 121761			

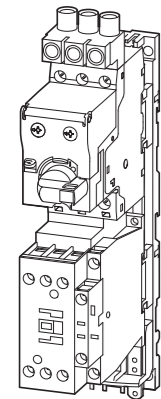

MSC-DE...



MSC-DEA...



Maximum motor rating AC HP = PS				Setting range Overload releases		Short-circuit releases		Short Circuit Current Rating			
200 V	230 V	460 V	575 V	I _r	I _{rm}	240 V	480 V	600 V	240 V	480 V	600 V
208 V	240 V	480 V	600 V								
HP	HP	HP	HP	A	A	kA	kA	kA			

Complete devices type E standard up to 32 A

Actuating voltage 110 V 50 Hz, 120 V 60 Hz											
-	-	0.5	0.5	0.3 - 1.2	168	14	14	14			
0.75	0.75	2	-	1 - 4	168	18	18	-			
3	3	7.5	-	3 - 12	168	18	18	-			
5	7.5	15	-	8 - 32	448	18	18	-			

Actuating voltage 220 V 50 Hz, 240 V 60 Hz											
-	-	0.5	0.5	0.3 - 1.2	168	14	14	14			
0.75	0.75	2	-	1 - 4	168	18	18	-			
3	3	7.5	-	3 - 12	168	18	18	-			
5	7.5	15	-	8 - 32	448	18	18	-			

Actuating voltage 230 V 50 Hz, 240 V 60 Hz											
-	-	0.5	0.5	0.3 - 1.2	168	14	14	14			
0.75	0.75	2	-	1 - 4	168	18	18	-			
3	3	7.5	-	3 - 12	168	18	18	-			
5	7.5	15	-	8 - 32	448	18	18	-			

Actuating voltage 24 V 50/60 Hz											
-	-	0.5	0.5	0.3 - 1.2	168	14	14	14			
0.75	0.75	2	-	1 - 4	168	18	18	-			
3	3	7.5	-	3 - 12	168	18	18	-			
5	7.5	15	-	8 - 32	448	18	18	-			

Actuating voltage 24 V DC											
-	-	0.5	0.5	0.3 - 1.2	168	14	14	14			
0.75	7.5	2	-	1 - 4	168	18	18	-			
3	3	7.5	-	3 - 12	168	18	18	-			
5	7.5	15	-	8 - 32	448	18	18	-			

Complete devices type E extended up to 32 A

Actuating voltage 24 V DC											
-	-	0.5	0.5	0.3 - 1.2	168	14	14	14			
0.75	0.75	2	-	1 - 4	168	18	18	-			
3	3	7.5	-	3 - 12	168	18	18	-			
5	7.5	15	-	8 - 32	448	18	18	-			


Complete devices type E Standard up to 65 A (without contactor)

7,5	7,5	20	25	8 - 32	448	65	65	25			
15	15	40	-	16 - 65	910	65	65	-			

Part no. Article no.	Price see price list	Std. pack	Notes
MSC-DE-1,2-M17-SP(110V50HZ,120V60HZ) 167802		1 off	The DOL starter type E (complete devices) consists of a PKE motor-protective circuit-breaker with AK-PKZ0, a DILM contactor and an extension terminal BK25/3-PKZ0-E. Motor-protective circuit-breaker and contactor mounted on top hat rail adapter plate. The connection of the main circuit between PKE and contactor is established with electrical contact modules.
MSC-DE-4-M17-SP(110V50HZ,120V60HZ) 167803			
MSC-DE-12-M17-SP(110V50HZ,120V60HZ) 167804			
MSC-DE-32-M32-SP(110V50HZ,120V60HZ) 167805			
MSC-DE-1,2-M17-SP(220V50HZ,240V60HZ) 167806			
MSC-DE-4-M17-SP(220V50HZ,240V60HZ) 167807			
MSC-DE-12-M17-SP(220V50HZ,240V60HZ) 167808			
MSC-DE-32-M32-SP(220V50HZ,240V60HZ) 167809			
MSC-DE-1,2-M17-SP(230V50HZ,240V60HZ) 167810			
MSC-DE-4-M17-SP(230V50HZ,240V60HZ) 167811			
MSC-DE-12-M17-SP(230V50HZ,240V60HZ) 167812			
MSC-DE-32-M32-SP(230V50HZ,240V60HZ) 167813			
MSC-DE-1,2-M17-SP(24V50/60HZ) 167814			
MSC-DE-4-M17-SP(24V50/60HZ) 167815			
MSC-DE-12-M17-SP(24V50/60HZ) 167816			
MSC-DE-32-M32-SP(24V50/60HZ) 167817			
MSC-DE-1,2-M17-SP(24VDC) 167818			
MSC-DE-4-M17-SP(24VDC) 167819			
MSC-DE-12-M17-SP(24VDC) 167820			
MSC-DE-32-M32-SP(24VDC) 167821			
MSC-DEA-1,2-M17-SP(24VDC) 167822		1 off	The DOL starter type E (complete devices) consists of a PKE motor-protective circuit-breaker with AK-PKZ0, a DILM contactor and an extension terminal BK25/3-PKZ0-E. Motor-protective circuit-breaker and contactor mounted on top hat rail adapter plate. The connection of the main circuit between PKE and contactor is established with electrical contact modules. The MSC-DEA... DOL starters are prepared for communication via SmartWire-DT. In order to be used this way, they first need to be expanded with the PKE-SWD-32 communications module.
MSC-DEA-4-M17-SP(24VDC) 167823			
MSC-DEA-12-M17-SP(24VDC) 167824			
MSC-DEA-32-M32-SP(24VDC) 167825			
PKE65/AK/XTUW-32-SP 170483		1 off	Starter type E consists of a PKE65 motor-protective circuit-breaker with AK-PKZ0 and an extension terminal BK50/3-PKZ4-E.
PKE65/AK/XTU-65-SP 170482			

Engineering

Tripping characteristics

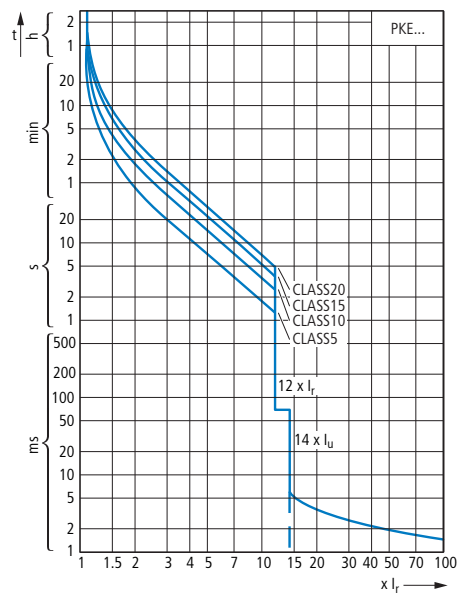

Short-circuit protection for PVC-insulated Cu cables



Trip block Part no.	Protected minimum cross-sectional area in mm ²							
	0.5	0.75	1.5	2.5	4	6	10	16
PKE-XTU(A)-1.2								
PKE-XTU(A)-4								
PKE-XTU(A)-12								
PKE-XTU(A)-32								
PKE-XTUCP(A)-36								
PKE-XTUW(A)-32								
PKE-XTU(A)-65								
PKE-XTUCP(A)-65								

Motor-protective circuit-breaker switching capacities, motor-starter combinations



Rated uninterrupted current I_u
 Rated conditional short-circuit current I_q IEC/EN 60947-4-1
 Rated ultimate short-circuit breaking capacity I_{cu} IEC/EN 60947-2
 Rated service short-circuit breaking capacity I_{cs} IEC/EN 60947-2

I_u A	230/400 V			415 V			440 V			500 V			525 V			690 V		
	I_q kA	I_{cu} kA	I_{cs} kA	I_q kA	I_{cu} kA	I_{cs} kA	I_q kA	I_{cu} kA	I_{cs} kA	I_q kA	I_{cu} kA	I_{cs} kA	I_q kA	I_{cu} kA	I_{cs} kA	I_q kA	I_{cu} kA	I_{cs} kA
PKE12/XTU(A)-... with type 1 and 2 coordination																		
1.2	100			50			15			10			10			3		
4	100			50			50			10			10			3		
12	100			50			20			20			10			3		
PKE32/XTU(A)-... with type 1 and 2 coordination																		
32	100			50			25			6			3			3		
PKE32/XTUCP(A)-... with type 1 and 2 coordination																		
36	-	50	12.5	-			-			-			-			-		
PKE65/XTU(W)(A) with type of coordination 1 and 2																		
32 - 65	80			80			45			15			10			5		
Motor-starter combinations MSC-DE(A)-...-M7(12)... with type 1 coordination																		
1.2	100			50			15			10			-			-		
4	100			50			50			50			-			-		
12	100			50			50			20			-			-		
Motor-starter combinations MSC-DE(A)-...-M17(32)... type 1 coordination																		
12	100			65			65			35			35			3		
32	100			100			65			50			5			5		
Motor-starter combinations MSC-DE(A)-...-M17(32)... with type 2 coordination																		
1.2	100			65			65			10			3			3		
4	100			65			65			50			3			3		
12	100			65			65			50			35			3		
32	100			100			65			50			35			3		
PKE12/XTU-...+DILM17+CL-PKZ0 with type 2 coordination																		
1.2 - 12	100			100			100			100			-			-		
PKE32/XTU-32+DILM32+CL-PKZ0 with type 2 coordination																		
32	100			100			100			100			-			-		
PKE65/XTU(A)-65+DILM(40, 50)65 with type 2 coordination																		
65	80			50			50			50			10			10		

Let-through current

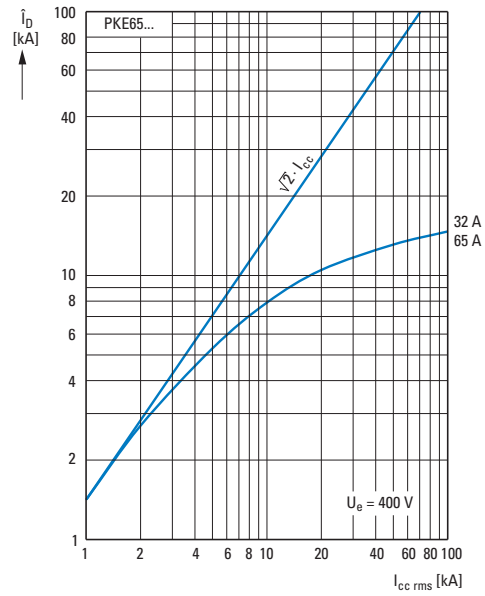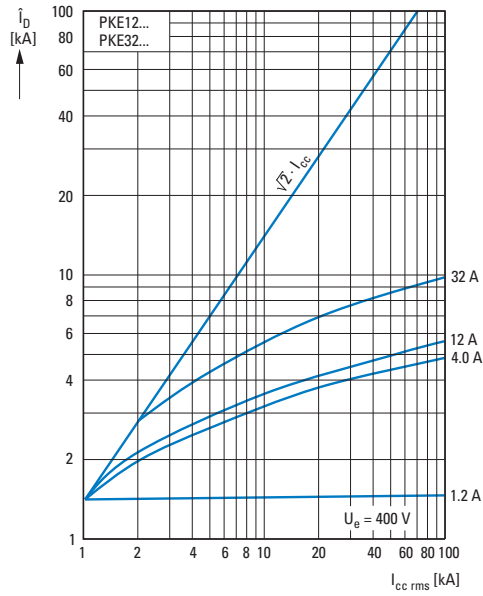

Let-through energy

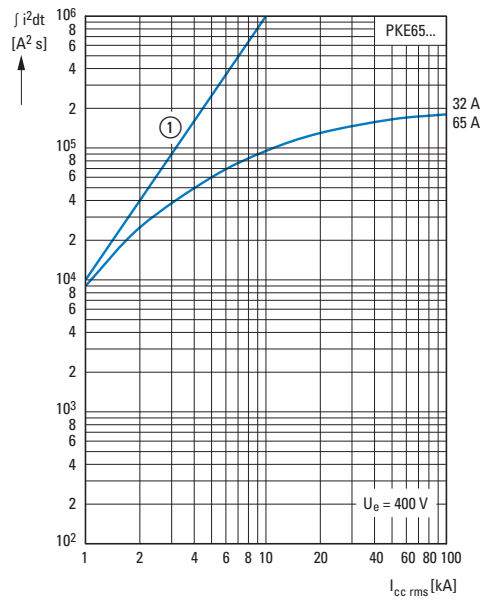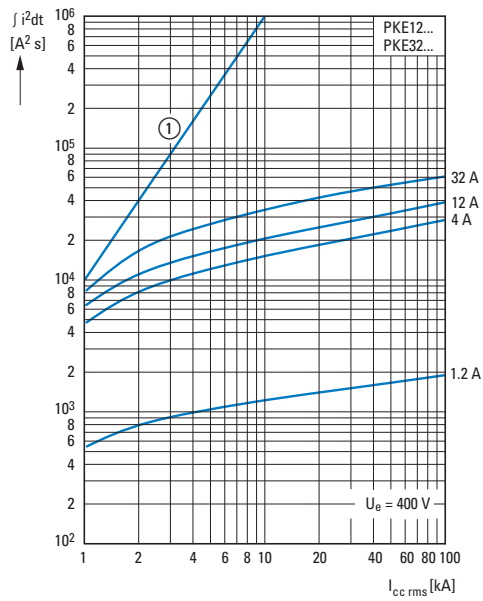

① 1 half-cycle

Engineering

ATEX approval

PKE motor-protective circuit-breakers comply with the requirements set forth in Directive 94/9/EC (ATEX 100a) concerning the protection of motors in "e" hazardous areas. A PTB 10 ATEX 3021 approval is available; please refer to manual MN03402004Z.

Switchgear and cable sizing corresponding to the respective starting inertia (CLASS)

The switchgear is designed for "CLASS 10" in normal and overload operation. To ensure that the switchgear (circuit-breaker and contactor) as well as the cables are not overloaded with extended tripping times, they must be over-dimensioned accordingly. The rated operational current I_e for switchgear and cables can be calculated with the following current factor while taking the tripping class into account:

Tripping class	Class 5	Class 10	Class 15	Class 20	Class 25	Class 30	Class 35	Class 40
Current factor for rated operational current I_e	1.00	1.00	1.22	1.41	1.58	1.73	1.89	2.00

Switching loads with large inrush currents

PKE motor-protective circuit-breakers come with two separate short-circuit protection systems with different pick-up times so as to ensure that they will also be able to handle the large inrush currents characteristic of high-efficiency motors (HEM) and transformers.

- PKE12, PKE32, PKE65 basic devices
Magnetic short-circuit release
Pick-up time of $14 \times I_u$, non-delayed (I_u = rated uninterrupted current)
- Standard and advanced trip blocks
Electronic short-circuit release
Pick-up time of $12 \times I_r$, short-time delay of 60 milliseconds (I_r = set rated operational current)

Example:

Switching on a transformer

- Rated operational current: $I_e = 10 \text{ A}$
- inrush current: $30 \times I_e = 300 \text{ A}$
- Inrush current duration: 10 ms (1 half-cycle)

Solution: PKE32 basic device + PKE-XTU-12 trip block

- Pick-up time for non-delayed release: $14 \times 32 \text{ A} = 448 \text{ A}$
- Pick-up time for delayed trip block ($I_e = I_r$): $12 \times 10 \text{ A} = 120 \text{ A}$



Combining PKE motor-protective circuit-breakers with variable frequency drives

Connecting a PKE upstream of a variable frequency drive:

- A PKE with a standard trip block can be used to provide short-circuit protection / overload protection for the cable leading to a variable frequency drive. The recommended setting for the PKE overload protection is the cable's operating current.
- Using a PKE with an advanced trip block for SmartWire-DT connections is not possible, since its functions, e.g., current measurements, phase failure, may work incorrectly.

Using a PKE downstream of a variable frequency drive is permitted within a frequency range of 20 to 120 Hz.

PKE in single-pole and double-pole configuration with alternating current



National approvals

Country	USA	CDN	RUS	PRC	UA	South Africa	Australia
Test authority	UL	CSA	GOST-R	CCC	Ukrain-GOST	SABS	C-Tick
PKE12, PKE32, PKE65	✓	✓	✓	Applied for	Currently under review	Applied for	✓


Shipping classifications

	Lloyd's Register of shipping	Germanischer Lloyd	Det Norske Veritas	Bureau Veritas	Registro Italiano Navale	Russian Maritime Register of Shipping	Polski Rejestr Statkow
PKE12, PKE32	✓	✓	✓	✓	Applied for	Applied for	Applied for
PKE65	Applied for	Applied for	Applied for	Applied for	Applied for	Applied for	Applied for

UL/CSA approvals

Product Standards		UL508; CSA-C22.2 No.14; IEC60947-4-1; CE marking
UL File No.	E36332	PKE12/(AK)..., PKE32/(AK)..., PKE65/(AK)..., PKE-XTU(W)(A)-..., NHI(-E)-...-PKZ0, AGM2-...-PKZ0, A(U)-PKZ0..., CL-PKZ0, BK25/3-PKZ0, PKZM0-XD(R)M12, PKE-X(R)H..., AK-PKZ0, B3.../...-PKZ0, H-B3-PKZ0
	E29184	PKE-SWD-32, PKE-SWD-SP, M22-TA
	E300273	BBA0(R)-25, BBA0(R)-32
	E123500	MSC-DE(A)-...-M...-SP(...), PKE65/AK/XTUW-32-SP, PKE65/AK/XTU-65-SP
UL CCN	NLRV	PKE12/(AK)..., PKE32/(AK)..., PKE65/(AK)..., PKE-XTU(W)(A)-..., NHI(-E)-...-PKZ0, AGM2-...-PKZ0, A(U)-PKZ0..., CL-PKZ0, BK25/3-PKZ0, PKZM0-XD(R)M12, PKE-X(R)H..., AK-PKZ0, B3.../...-PKZ0, H-B3-PKZ0
	NKCR	PKE-SWD-32, PKE-SWD-SP, M22-TA
	NMTR, NMTRZ	BBA0(R)-25, BBA0(R)-32
	NKJH	MSC-DE(A)-...-M...-SP(...), PKE65/AK/XTUW-32-SP, PKE65/AK/XTU-65-SP
CSA File No.	165628	PKE12/(AK)..., PKE32/(AK)..., PKE65/(AK)..., PKE-XTU(W)(A)-..., NHI(-E)-...-PKZ0, AGM2-...-PKZ0, A(U)-PKZ0..., CL-PKZ0, BK25/3-PKZ0, PKZM0-XD(R)M12, PKE-X(R)H..., AK-PKZ0, MSC-DE(A)-...-M...-SP(...), PKE-SWD-32, PKE-SWD-SP (CSA applied for), PKE65/AK/XTUW-32-SP, PKE65/AK/XTU-65-SP
	98494	B3.../...-PKZ0, H-B3-PKZ0
	232140	BBA0(R)-25, BBA0(R)-32
CSA Class No.	3211-05	PKE12/(AK)..., PKE32/(AK)..., PKE65/(AK)..., PKE-XTU(W)(A)-..., NHI(-E)-...-PKZ0, AGM2-...-PKZ0, A(U)-PKZ0..., CL-PKZ0, BK25/3-PKZ0, PKZM0-XD(R)M12, PKE-X(R)H..., AK-PKZ0
	3211-06	B3.../...-PKZ0, H-B3-PKZ0
	3211-07	PKE-SWD-32, PKE-SWD-SP (CSA applied for)
	3211-37	BBA0(R)-25, BBA0(R)-32
	3211-08	MSC-DE(A)-...-M...-SP(...), PKE65/AK/XTUW-32-SP, PKE65/AK/XTU-65-SP
	3211-03	M22-TA
NA Certification	UL listed, CSA certified	
Specially designed for NA	only MSC-DE(A)-...-M...-SP(...)	
Degree of protection	only PKE-X(R)H...; IEC: IP65, UL/CSA Type: 4X, 12	

Technical data

			PKE12..., PKE32...	PKE65...
General				
Standards			IEC/EN 60947, VDE 0660	
Climatic proofing			Damp heat, constant to IEC 60068-2-78 Damp heat, cyclic to IEC 60068-2-30	
Ambient temperature				
Storage	θ	°C	-40 - +80	
Open		°C	-25 - +55	
Enclosed		°C	-25 - +40	
Mounting position				
Direction of incoming supply			as required	
Degree of protection				
Device			IP20	
Terminations			IP00	
Busbar tag shroud to EN 50274			Finger- and back-of-hand proof	
Mechanical shock resistance half-sinusoidal shock 10 ms to IEC 60068-2-27		g	25	
Altitude		m	Max. 2000	
Terminal capacity screw terminals				
Solid		mm ²	1 x (1 - 6) 2 x (1 - 6)	1 x (0.75 - 16) 2 x (0.75 - 16)
Flexible with ferrule to DIN 46228		mm ²	1 x (1 - 6) 2 x (1 - 6)	1 x (0.75 - 35) 2 x (0.75 - 25)
Solid or stranded		AWG	14 - 10	14 - 2
Specified tightening torque for terminal screws				
Main cable		Nm	1.7	3.3
Control circuit cables		Nm	1	1
Main conducting paths				
Rated impulse withstand voltage	U_{imp}	V AC	6000	
Overvoltage category/pollution degree			III/3	
Rated operational voltage	U_e	V AC	690	
Rated uninterrupted current = rated operational current	$I_u = I_e$	A	12 A or set current of the overload release 32 A or set current of the overload release	65 A or set current of the overload release
Rated frequency	f	Hz	40 - 60	
Current heat loss (3 pole at operating temperature)		W	6 (with PKE-XTU(A)-32) 3.5 (with PKE-XTU(A)-12) 0.5 (with PKE-XTU(A)-4) 0.4 (with PKE-XTU(A)-1,2)	22 (with PKE65-XTU(A)-65) 6 (with PKE-XTUW(A)-32)
Lifespan, mechanical	Operations	x 10 ⁶	0.05	
Lifespan, electrical (AC-3 at 400 V)	Operations	x 10 ⁶	0.05	
Max. operating frequency		Ops/h	60	60
Motor switching capacity				
AC-3 (up to 690 V)		A	12 32	65
Releases				
Temperature compensation		°C	-5 - +40 (to IEC/EN 60947, VDE 0660) -25 - +55 (operating range)	
Setting range of overload releases			0.25 - 1 x I_u	
Fixed short-circuit release			Basic device 14 x I_u	
Short-circuit release tolerance			± 20%	
Phase-failure sensitivity			yes	

			PKE-SWD-32	PKE-SWD-SP
General				
Standards			IEC/EN 61131-2 EN 50178 IEC/EN 60947	IEC/EN 61131-2
Dimensions (W x H x D)		mm	45 x 38 x 76	45 x 46.8 x 70.3
Weight		kg	0.04	0.02
Mounting			on DILM7...DILM32	at PKE12/32/65
Mounting position			as DILM7 to DILM32	as PKE 12/35/65
Ambient conditions, mechanical				
Protection type (IEC/EN 60529, EN50178, VBG 4)			IP20	IP20
Vibrations (IEC/EN 61131-2:2008)				
Constant amplitude 3,5 mm		Hz	5 - 8.4	5 - 8.4
Constant acceleration 1 g		Hz	8.4 - 150	8.4 - 150
Mechanical shock resistance (IEC/EN 60068-2-27) semi-sinusoidal 15 g/11 ms				
Drop to IEC/EN 60068-2-31	Drop height	mm	50	50
Free fall, packaged (IEC/EN 60068-2-32)		m	0.3	0.3
Electromagnetic compatibility (EMC)				
Overvoltage category				
			II	II
Pollution degree				
			2	2
Electrostatic discharge (IEC/EN 61131-2:2008)				
Air discharge (Level 3)		kV	8	8
Contact discharge (Level 2)		kV	4	4
Electromagnetic fields (IEC/EN 61131-2:2008)				
80 - 1000 MHz		V/m	10	10
1.4 - 2 GHz		V/m	3	3
2 - 2.7 GHz		V/m	1	1
Radio interference suppression SmartWire-DT				
Burst (IEC/EN 61131-2:2008, Level 3)				
CAN/DP-bus cable		kV	1	1
SmartWire-DT cables		kV	1	1
Radiated RFI (IEC/EN 61131-2:2008, Level 3)				
		V	10	10
Climatic environmental conditions				
Operating ambient temperature (IEC 60068-2)				
		°C	-25 - +60	-25 - +60
Condensation				
			Take appropriate measures to prevent condensation	Take appropriate measures to prevent condensation
Storage	θ	°C	-30 - +70	-30 - +70
relative humidity, non-condensing (IEC/EN 60068-2-30)				
		%	5 - 95	5 - 95
SmartWire-DT network				
Station type				
			SmartWire-DT slave	SmartWire-DT slave
Address allocation				
			automatic	automatic
Status SmartWire-DT				
		LED	green/orange	Green
Connections				
			Plug, 8-pole	Plug, 8-pole
Connection				
			External device plug SWD4-8SF2-5	External device plug SWD4-8SF2-5
Current consumption				
15-V-SWD supply		mA	58	35
24-V-DC-SWD control voltage	U_{aux}		See the contactor's pick-up current and holding current (max. 0.5 A).	-
Operating mode				
Manual/automatic mode				
			yes	-
Setting				
			Rotary switch	-
Connection auxiliary contact				
Cable length				
		m	≤ 2.8	-
Connection type				
			Push in terminals	-
Terminal capacities				
Solid				
		mm ²	0.2 - 1.5 (AWG 24 - 16)	-
Flexible with ferrule				
		mm ²	0.25 - 1.5	-


				NHI...PKZ0	NHI-E-...PKZ0	AGM2-...PKZ0
Auxiliary contacts						
Rated impulse withstand voltage	U_{imp}	V AC		6000	4000	6000
Overvoltage category/pollution degree				III/3	III/3	III/3
Rated operational voltage						
	U_e	V AC		500	440	500
	U_e	V DC		250	250	250
Safe isolation according to EN 61140						
Between auxiliary contacts and main contacts		V AC		690	690	690
Rated operational current						
AC-15						
	220 V 230 V 240 V	I_e	A	3.5	1	3.5
	380 V 400 V 415 V	I_e	A	2	-	2
	440 V 500 V	I_e	A	1	-	1
DC-13 L/R - 100 ms						
	24 V	I_e	A	2	2	2
	60 V	I_e	A	1.5	-	1.5
	110 V	I_e	A	1	-	1
	220 V	I_e	A	0.25	-	0.25
Lifespan						
Lifespan, mechanical	Operations	$\times 10^6$		0.1	0.1	0.01
Lifespan, electrical	Operations	$\times 10^6$		0.05	0.1	0.05
Control circuit reliability	Failure rate	λ		10^{-8}, <math>< \text{one failure at 100 million operations}</math> (at $U_e = 24 \text{ V DC}$, $U_{min} = 17 \text{ V}$, $I_{min} = 5.4 \text{ mA}$)		
interlocked opposing contacts				yes	-	-
Short-circuit rating without welding						
Fuseless	Type			FAZ-B4/1-HI	-	FAZ-B4/1-HI
Fuse	A gG/gL			10	10	10
Terminal capacities						
Solid or flexible conductor with ferrule		mm ²		0.75 - 2.5	0.75 - 1.5	0.75 - 2.5
Solid or stranded		AWG		18 - 14	18 - 16	18 - 14

				A-PKZ0...	U-PKZ0...
General					
Terminal capacities					
Solid or flexible conductor with ferrule		mm ²		1 x (0.75 - 2.5) 2 x (0.75 - 2.5)	1 x (0.75 - 2.5) 2 x (0.75 - 2.5)
Solid or stranded		AWG		1 x (18 - 14) 2 x (18 - 14)	1 x (18 - 14) 2 x (18 - 14)
Pick-up-/drop-out voltage					
Pick-up voltage	$\times U_s$			-	0.85 - 1.1
Drop-out voltage	$\times U_s$			-	0.7 - 0.35
Operating range					
AC	$\times U_s$			0.7 - 1.1	-
DC (Short-time operation 5 s)	$\times U_s$			0.7 - 1.1	-
Power consumption					
AC					
Pick-up AC	Pick-up	VA		5	5
Sealing AC	Sealing	VA		3	3
DC					
Pick-up DC	Pick-up	W		3	3
Sealing DC	Sealing	W		3	3

Dimensions


Motor-protective circuit-breakers

Complete device with standard knob
Complete device with AK lockable rotary handle
PKE12
PKE32

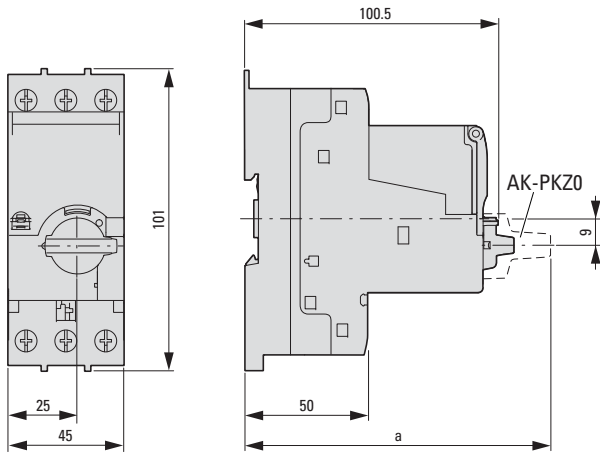

Part no.	a
PKE12/...	102.5
PKE12/AK...	120.5
PKE32/...	102.5
PKE32/AK...	120.5


PKE65

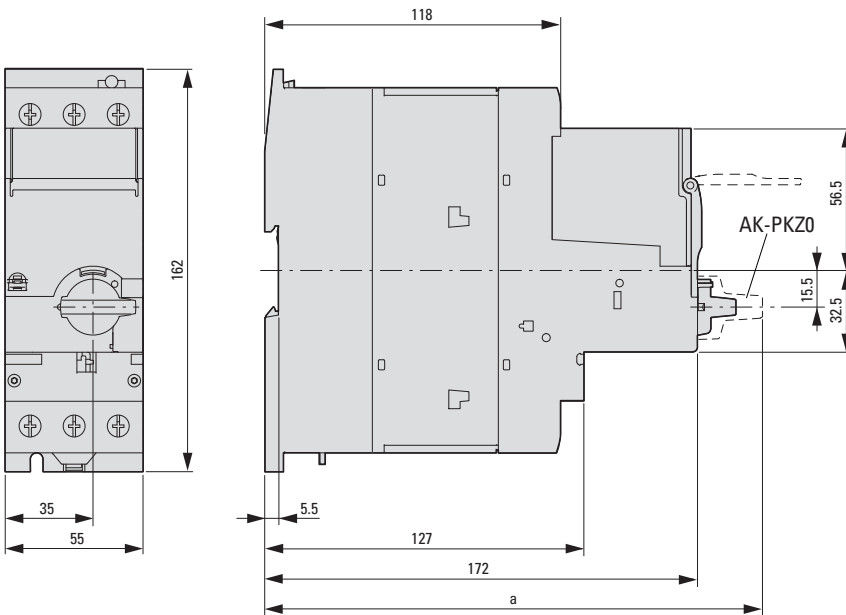

Part no.	a
PKE65/...	187
PKE65/AK...	198


SmartWire-DT PKE module (motor-starter combinations)

PKE-SWD-32

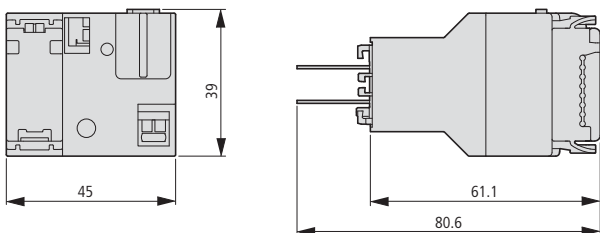


SmartWire-DT PKE (motor-protective circuit-breaker)

PKE-SWD-SP

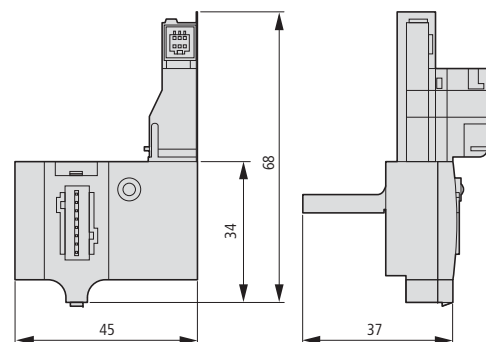


Standard auxiliary contact

NHI...-PKZ0



Trip-indicating auxiliary contacts


AGM2...-PKZ0



Shunt release


Undervoltage release

A-PKZ0
U-PKZ0

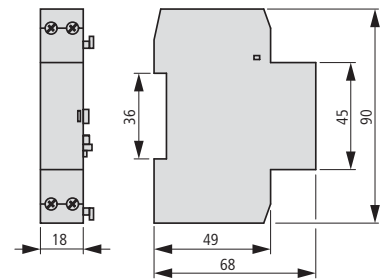


Three-phase commoning link

B3.0/4-PKZ0
B3.0/2-PKZ0




B3.2/4-PKZ0
B3.2/2-PKZ0

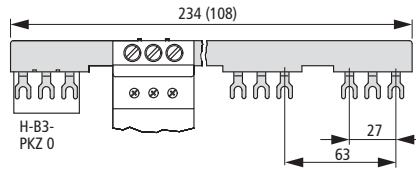


B3.1/5-PKZ0
B3.1/4-PKZ0

B3.1/3-PKZ0
B3.1/2-PKZ0

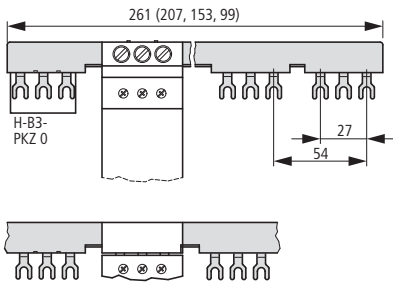

Incoming terminal


BK25/3-PKZ0

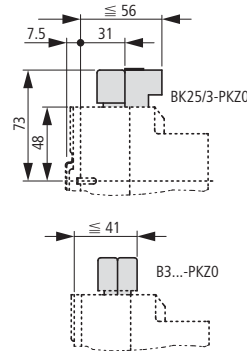

Overlapping mounting to extend the three-phase commoning link

Door coupling handle

PKE-X(R)H...

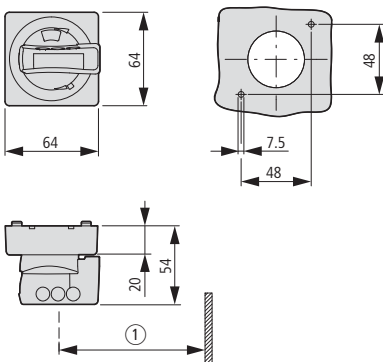


Mounting depth: 152 to 267 mm from the top edge of the top-hat rail to the front edge of the cabinet door/cover


① At least 100 mm from cover hinge

DOL starters (complete units)

MSC-DE(A)-...-M7[...12]...

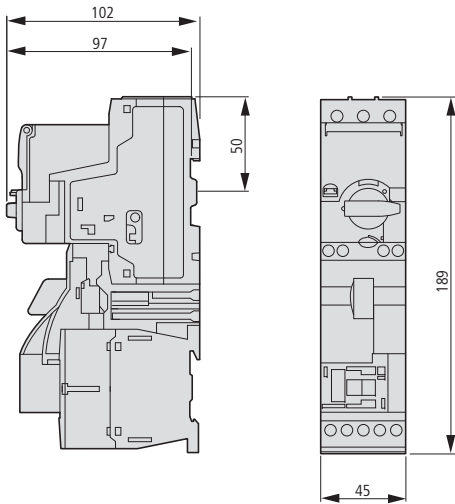


MSC-DE(A)-...-M17[...32]...

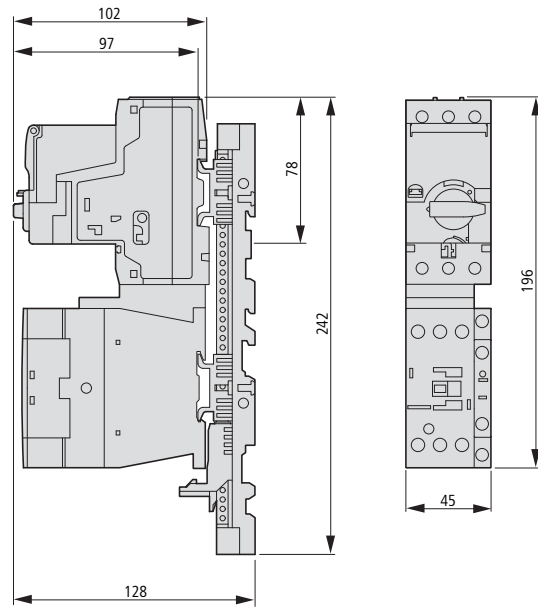

DOL starter type E

MSC-DE(A)-...-M17-SP...

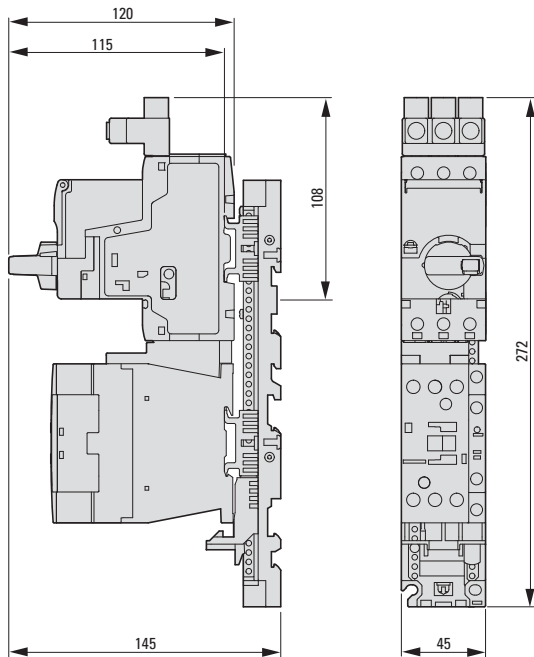

Eaton is dedicated to ensuring that reliable, efficient and safe power is available when it's needed most. With unparalleled knowledge of electrical power management across industries, experts at Eaton deliver customized, integrated solutions to solve our customers' most critical challenges.

Our focus is on delivering the right solution for the application. But, decision makers demand more than just innovative products. They turn to Eaton for an unwavering commitment to personal support that makes customer success a top priority. For more information, **visit www.eaton.eu**.

To contact an Eaton salesperson or local distributor/agent, please visit www.eaton.eu/electrical/customersupport

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton internet pages and Eaton order confirmations.

Eaton Industries GmbH

Hein-Moeller-Str. 7-11
D-53115 Bonn/Germany

© 2012 by Eaton Corporation
All rights reserved
Printed in Germany 11/12
Publication No.: CA03402001Z-EN-INT
Doku/DHW/jp/gro 11/12
Article No.: 168969



Eaton is a registered trademark of Eaton Corporation

All other trademarks are property of their respective owners.

SmartWire-DT® is a registered trademark of Eaton Corporation.



Powering Business Worldwide